
TectoMT: Machine Translation System

Martin Popel

ÚFAL (Institute of Formal and Applied Linguistics)
Charles University in Prague



MT Marathon
September 12, 2013, Prague

Outline

- Treex (framework) vs. TectoMT (MT system)
- Demo translation step by step
- Annotation of translation errors
- Details
 - Hidden Markov Tree Models (HMTM)
 - Combining dictionaries
 - Maximum Entropy dictionary
- Results
- Examples of translation

Treeex vs. TectoMT

2005

...

2011

NLP framework
TectoMT

MT system
TectoMT

lemmatization
tagging
parsing

Main author:
Zdeněk Žabokrtský

multi-purpose
NLP framework
Treeex

MT system
TectoMT

coreference

CzEng analysis

named entity r.

SMT preproc.

lemmatization
tagging
parsing


PEDT preprocessing

treebank conversions

alignment (word,tree)


etc.

Treex architecture

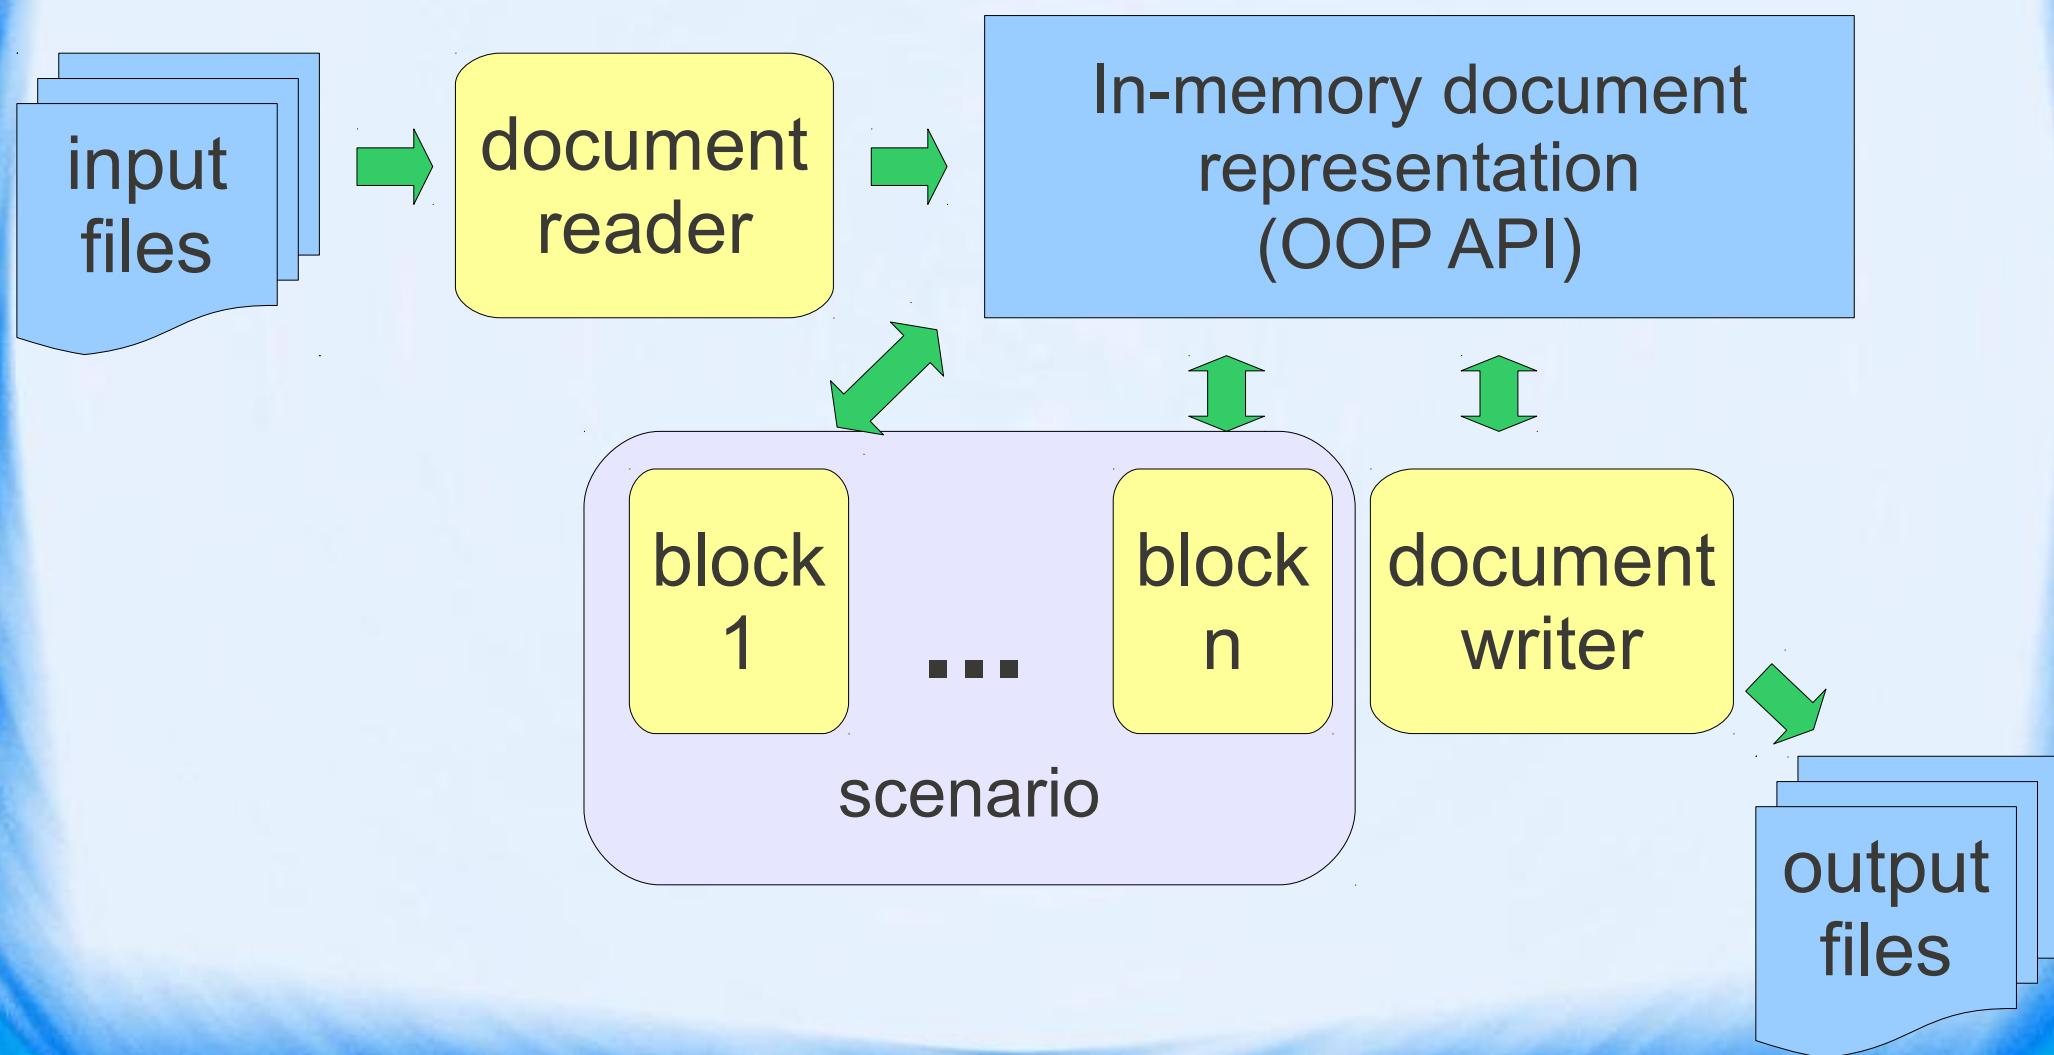


Translation scheme

transfer over the tectogrammatical layer

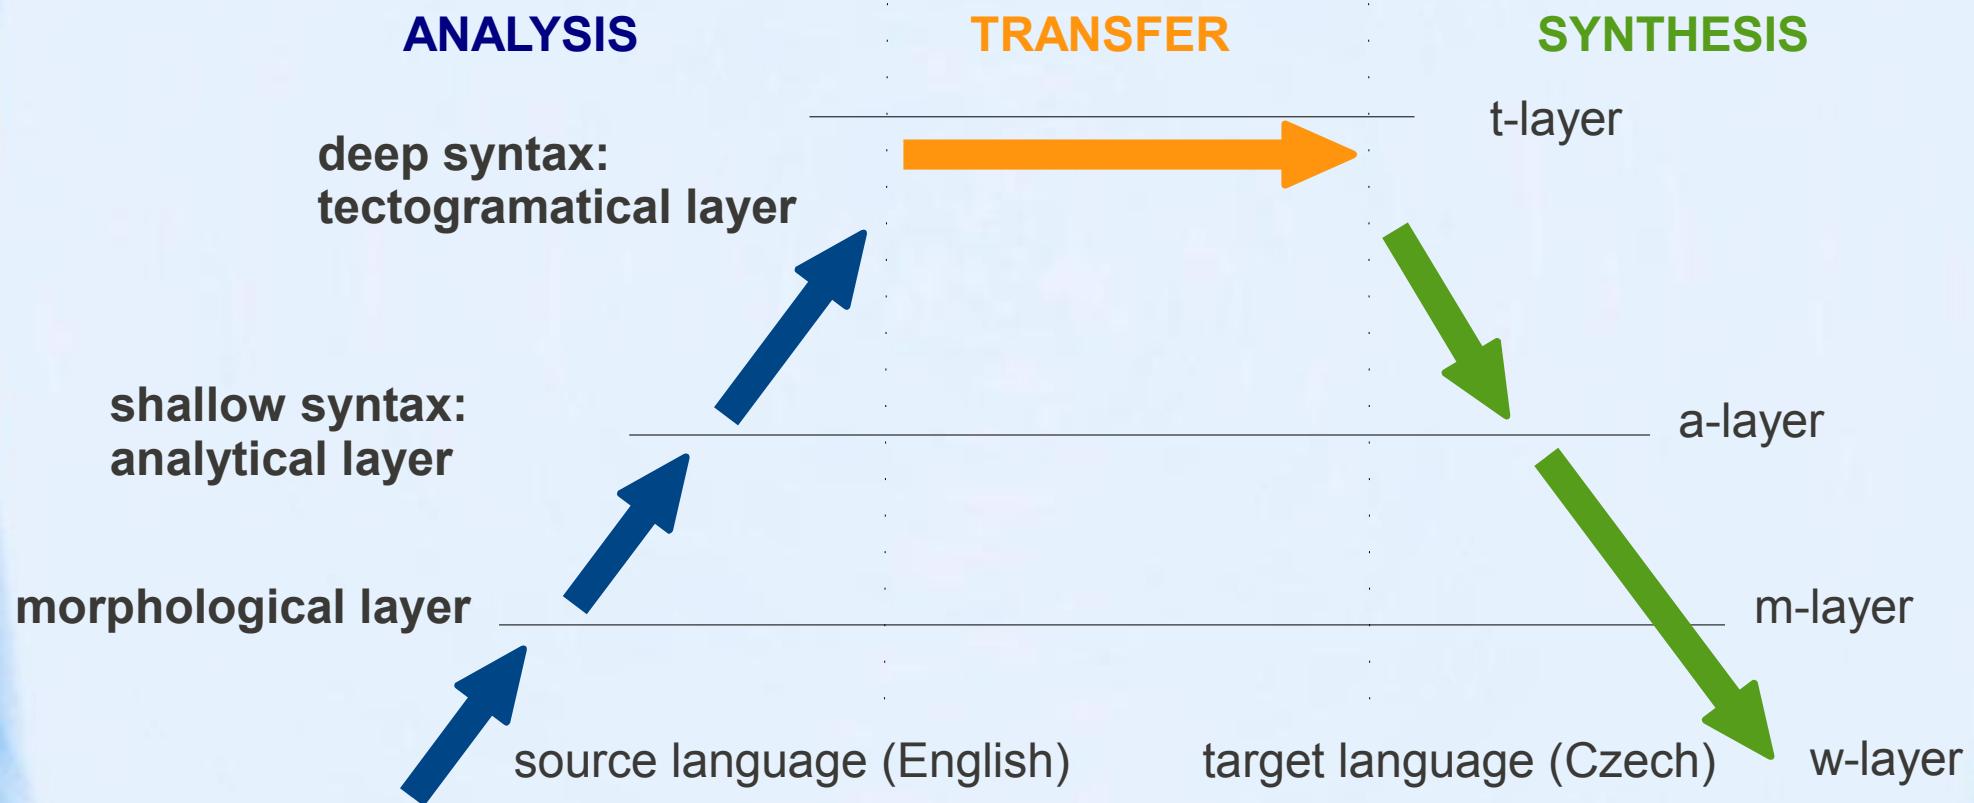

Translation scheme

rule based & **statistical** blocks

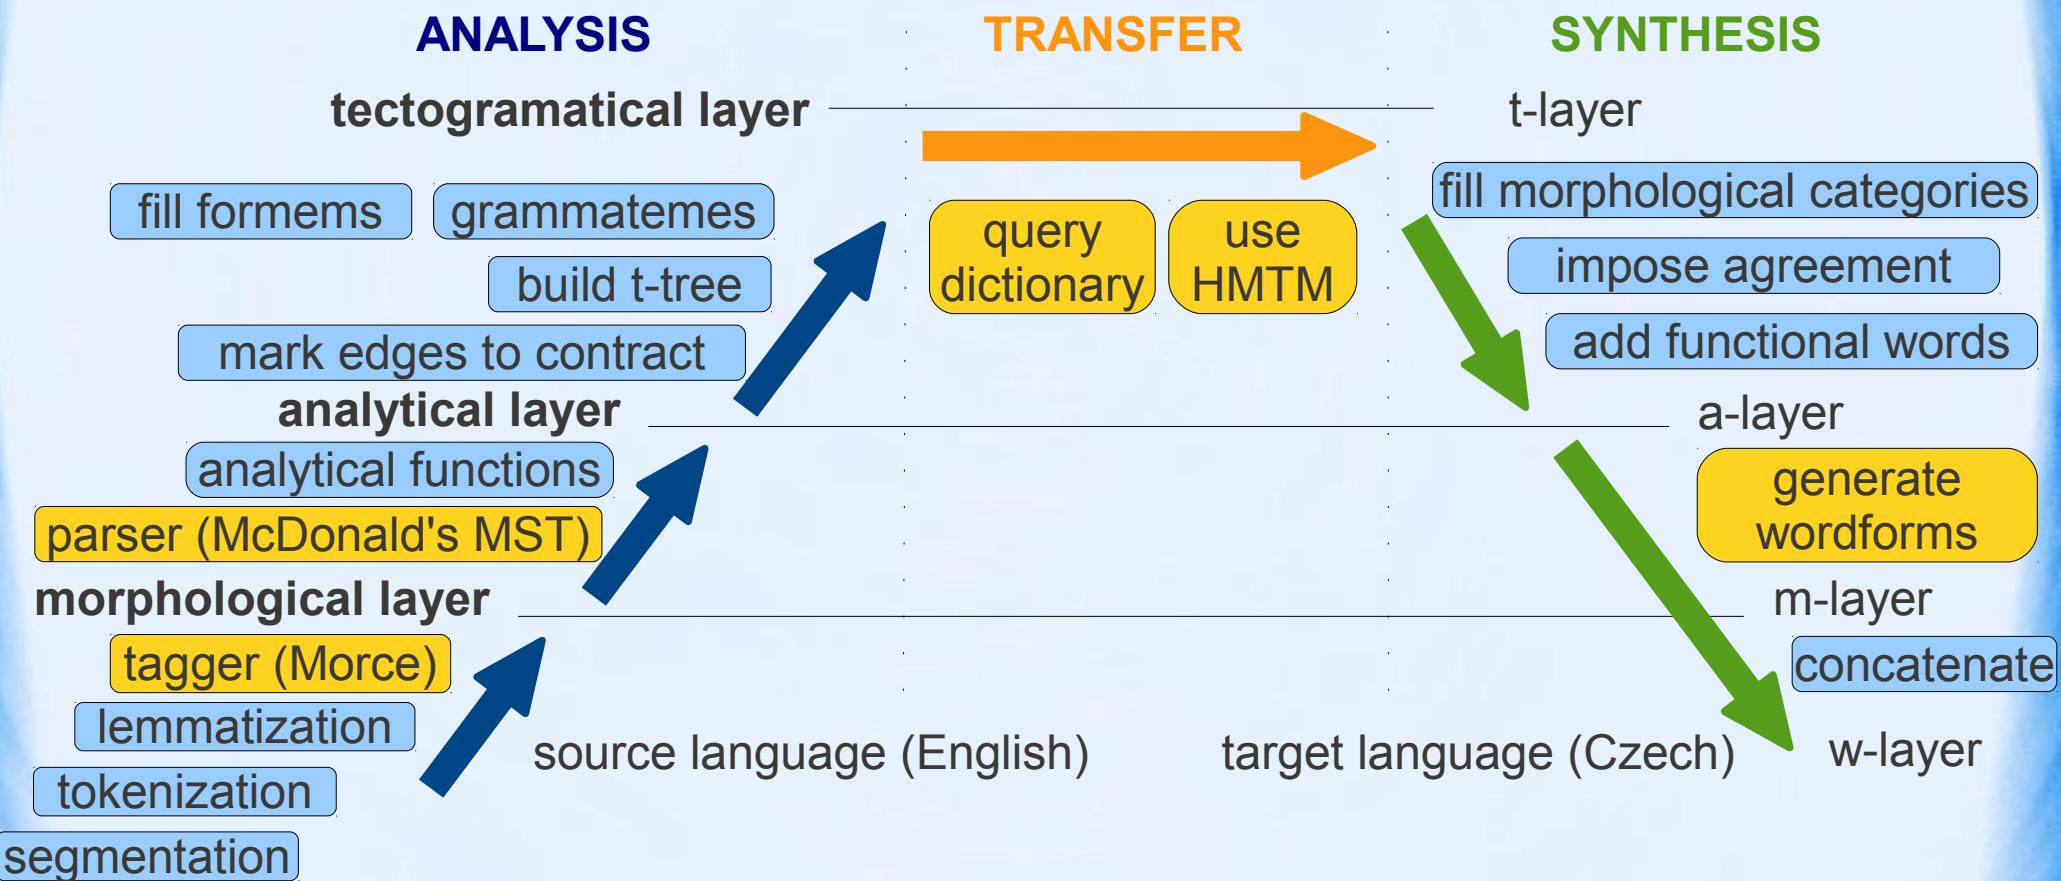

Demo Translation – Analysis


raw text

Machine translation should be easy.

m-layer

machine translation should be easy .
NN NN MD VB JJ .

a-layer

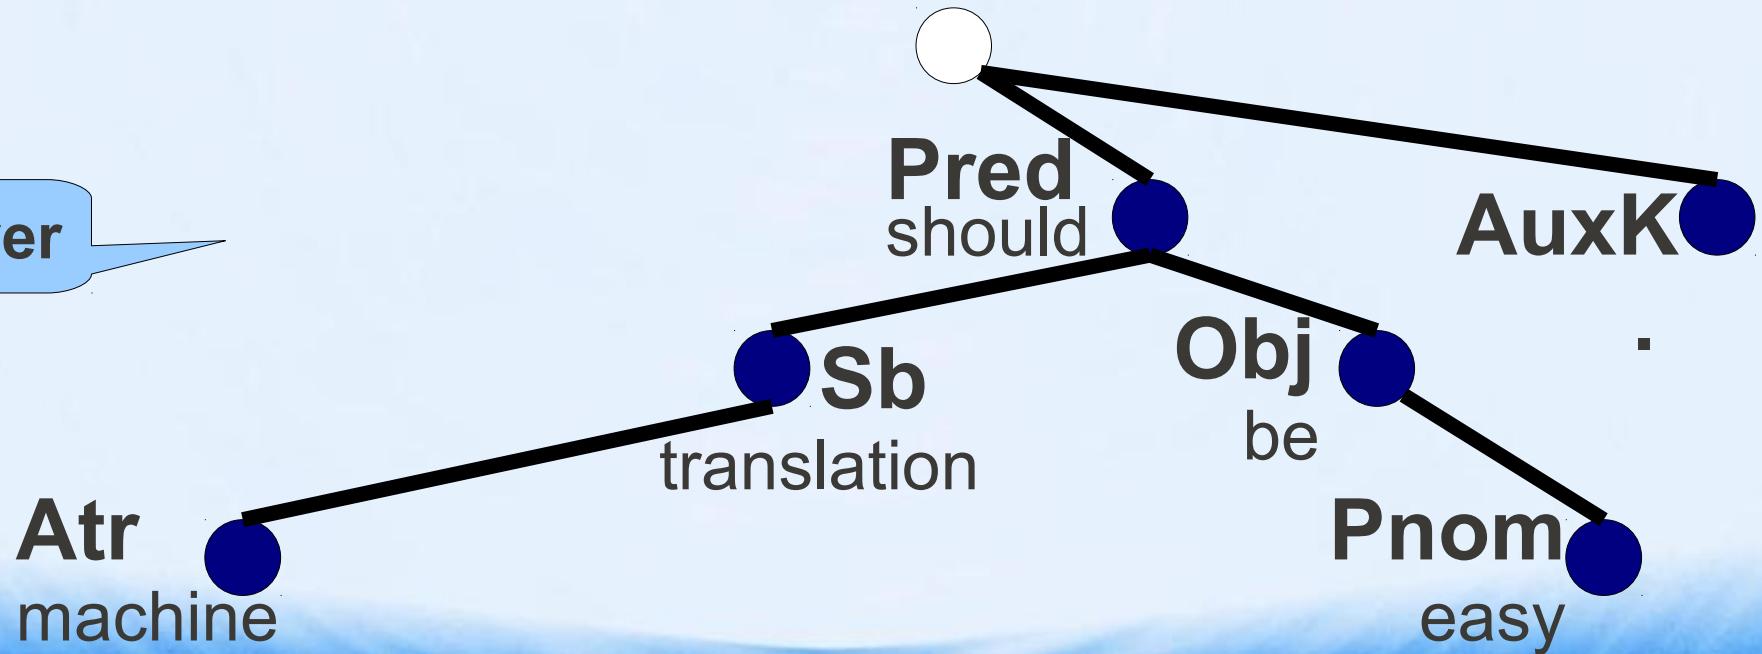

Demo Translation – Analysis

raw text


Machine translation should be easy.

m-layer

machine translation should be easy .

NN NN MD VB JJ .

a-layer

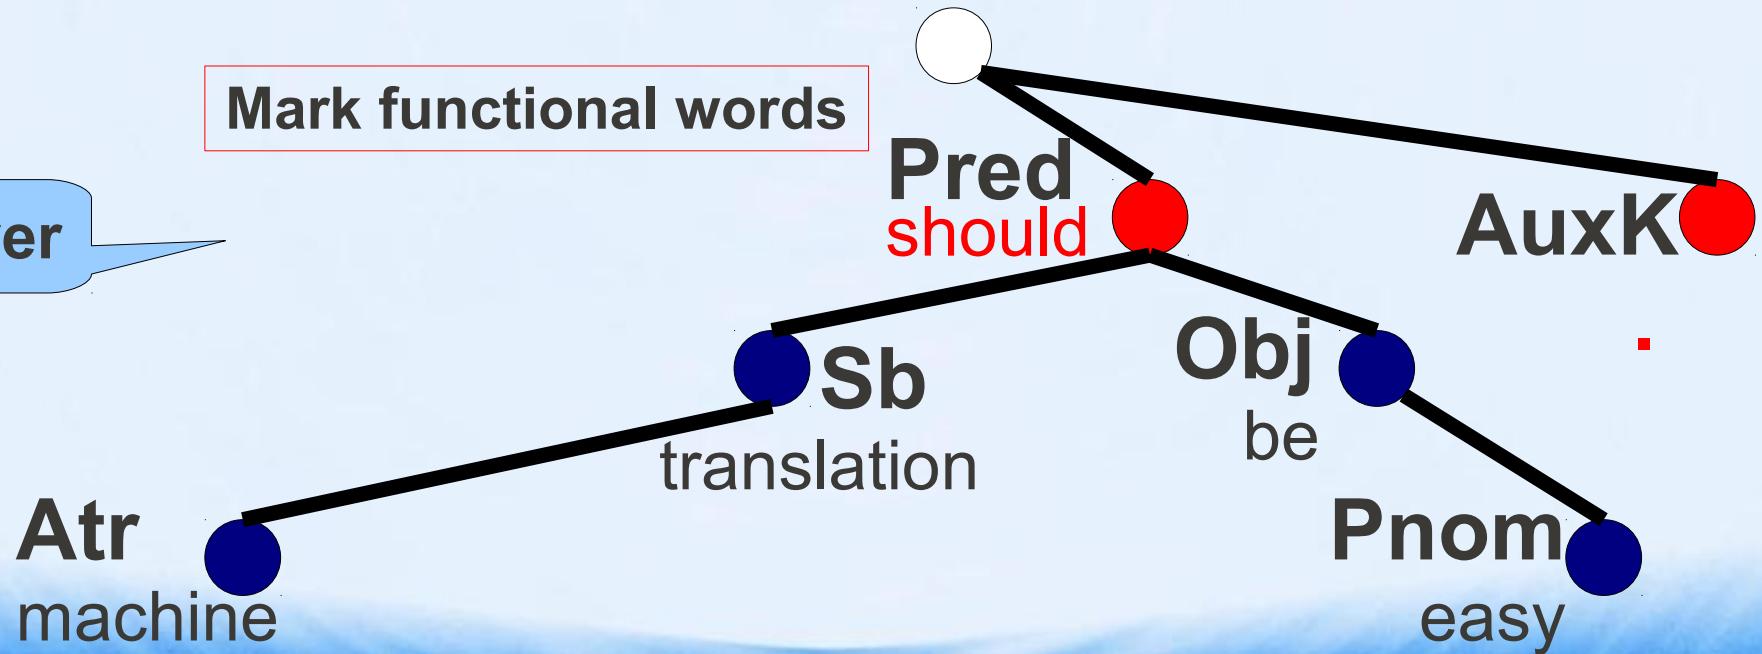

Demo Translation – Analysis

raw text

Machine translation should be easy.


m-layer

machine translation should be easy .

NN NN MD VB JJ .

a-layer

Mark edges to be contracted

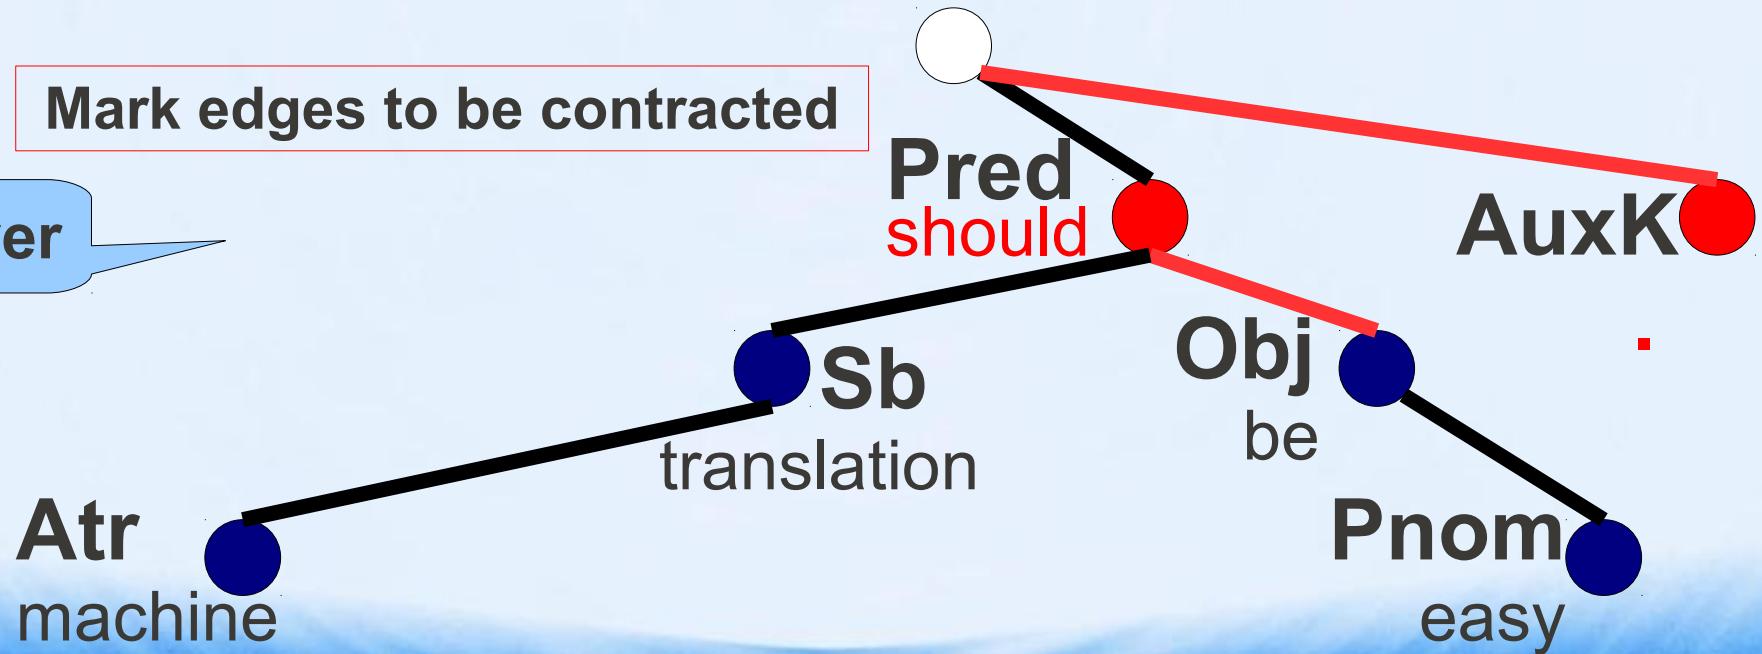

Demo Translation – Analysis

raw text

Machine translation should be easy.

m-layer

machine translation should be easy .
NN NN MD VB JJ .

Build t-tree (backbone)

t-layer



The diagram illustrates the construction of a t-tree backbone. It starts with the word "machine" at the bottom left, connected by a horizontal line to a blue circular node. This node is then connected by two diagonal lines to two other blue circular nodes, which are labeled "translation" and "be". From the "be" node, two more diagonal lines extend to two additional blue circular nodes labeled "easy" and a small white circle above it. The entire process is enclosed in a red-bordered box labeled "Build t-tree (backbone)".

Demo Translation – Analysis


raw text

Machine translation should be easy.

m-layer

machine translation should be easy .
 NN NN MD VB JJ .

t-layer

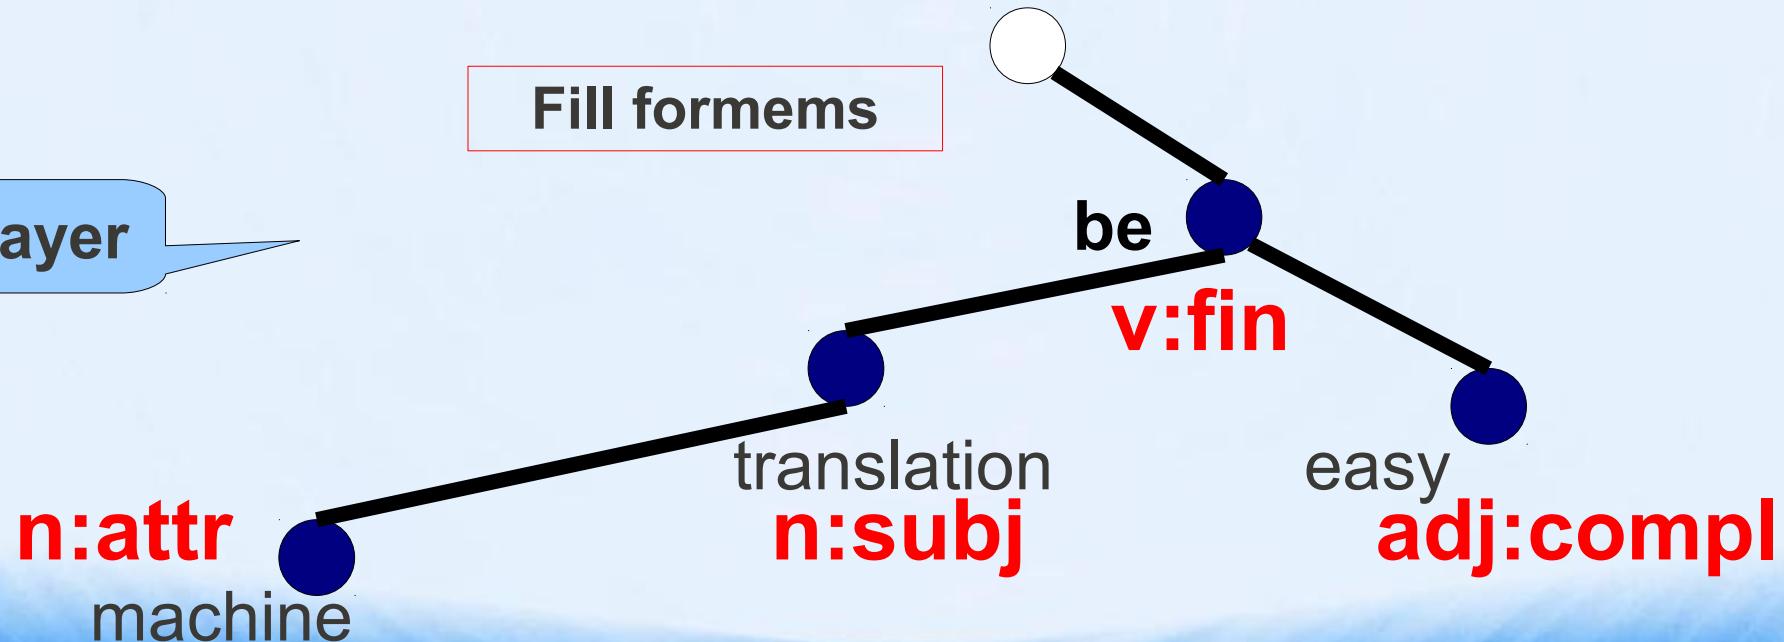

Demo Translation – Analysis

raw text

Machine translation should be easy.

m-layer

machine translation should be easy .

NN NN MD VB JJ .

t-layer

Fill grammatemes

n:attr
machine

translation
n:subj
number = singular

be
v:fin

tense = simple,
modality, conditional

easy
adj:compl
degree of comparison
= positive

Demo Translation – Transfer


Build target t-tree by cloning

source t-layer

machine n:attr

target t-layer

machine n:attr

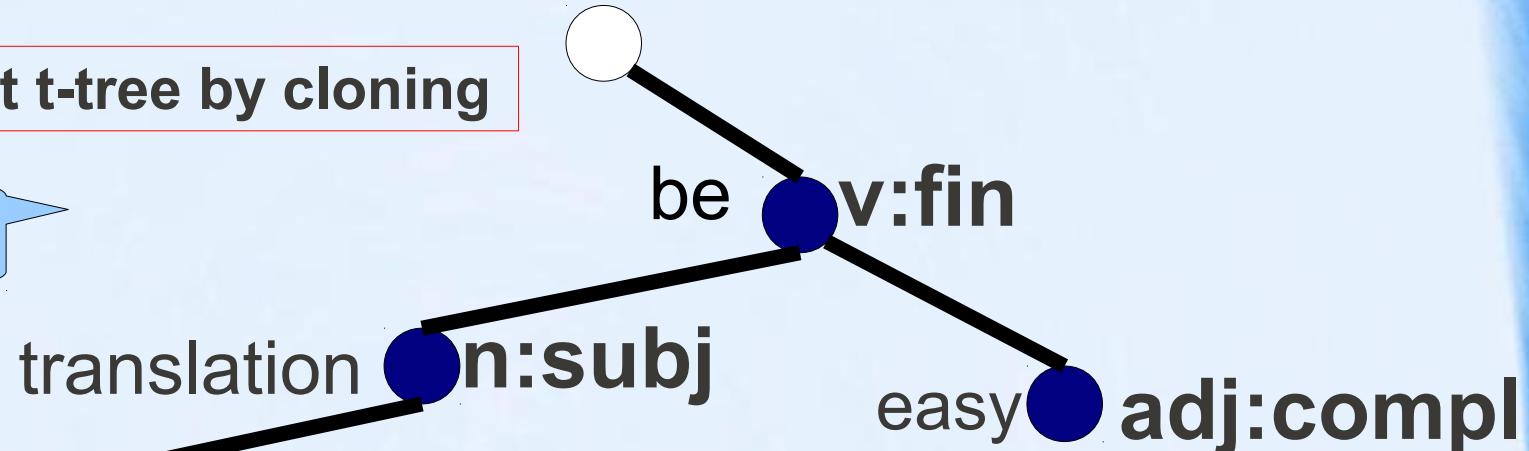

Demo Translation – Transfer



Get translation variants
for lemmas and formems

source t-layer

machine n:attr

target t-layer

počítač
stroj
strojový
n:2
n:attr
adj:attr

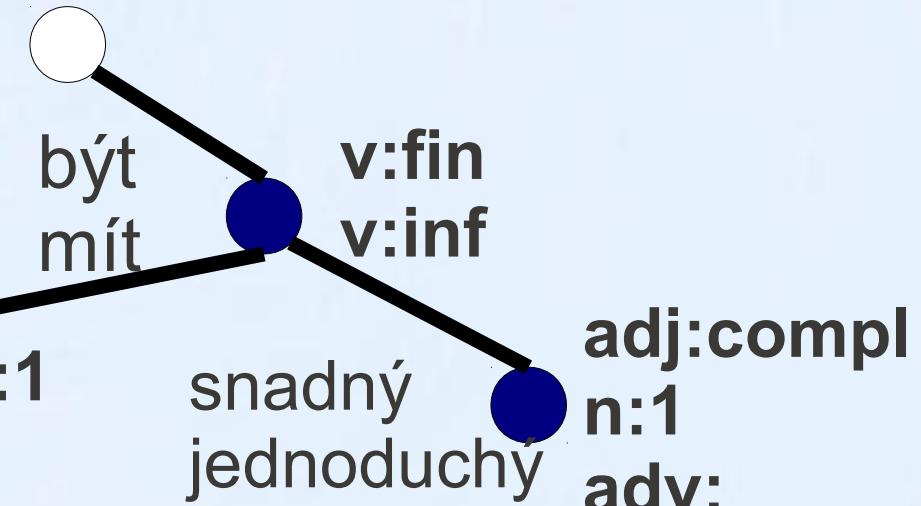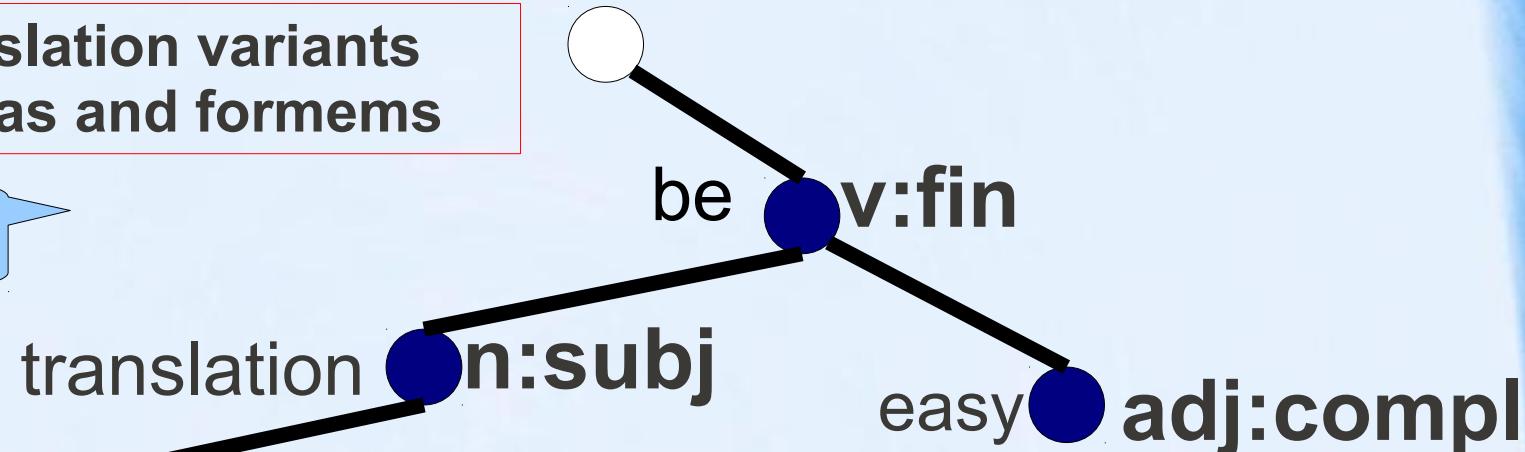

Demo Translation – Transfer


Select the best combination
of lemmas and formems

source t-layer

machine

target t-layer

počítač
stroj
strojový

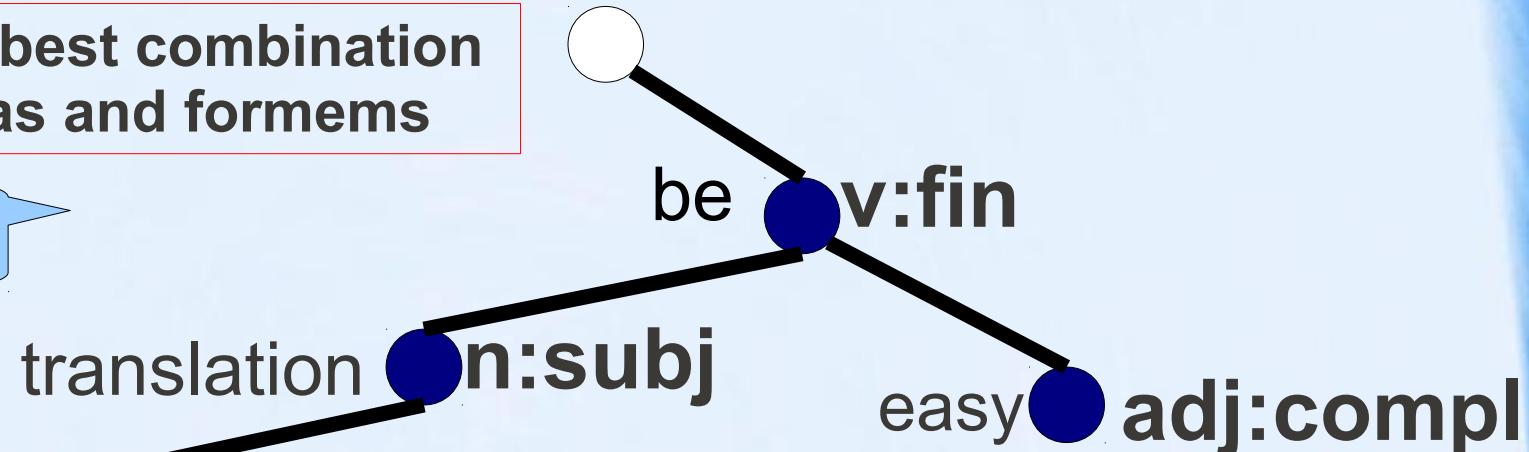

Demo Translation – Synthesis


Build target a-layer by cloning

target t-layer

strojový adj:attr

target a-layer

strojový

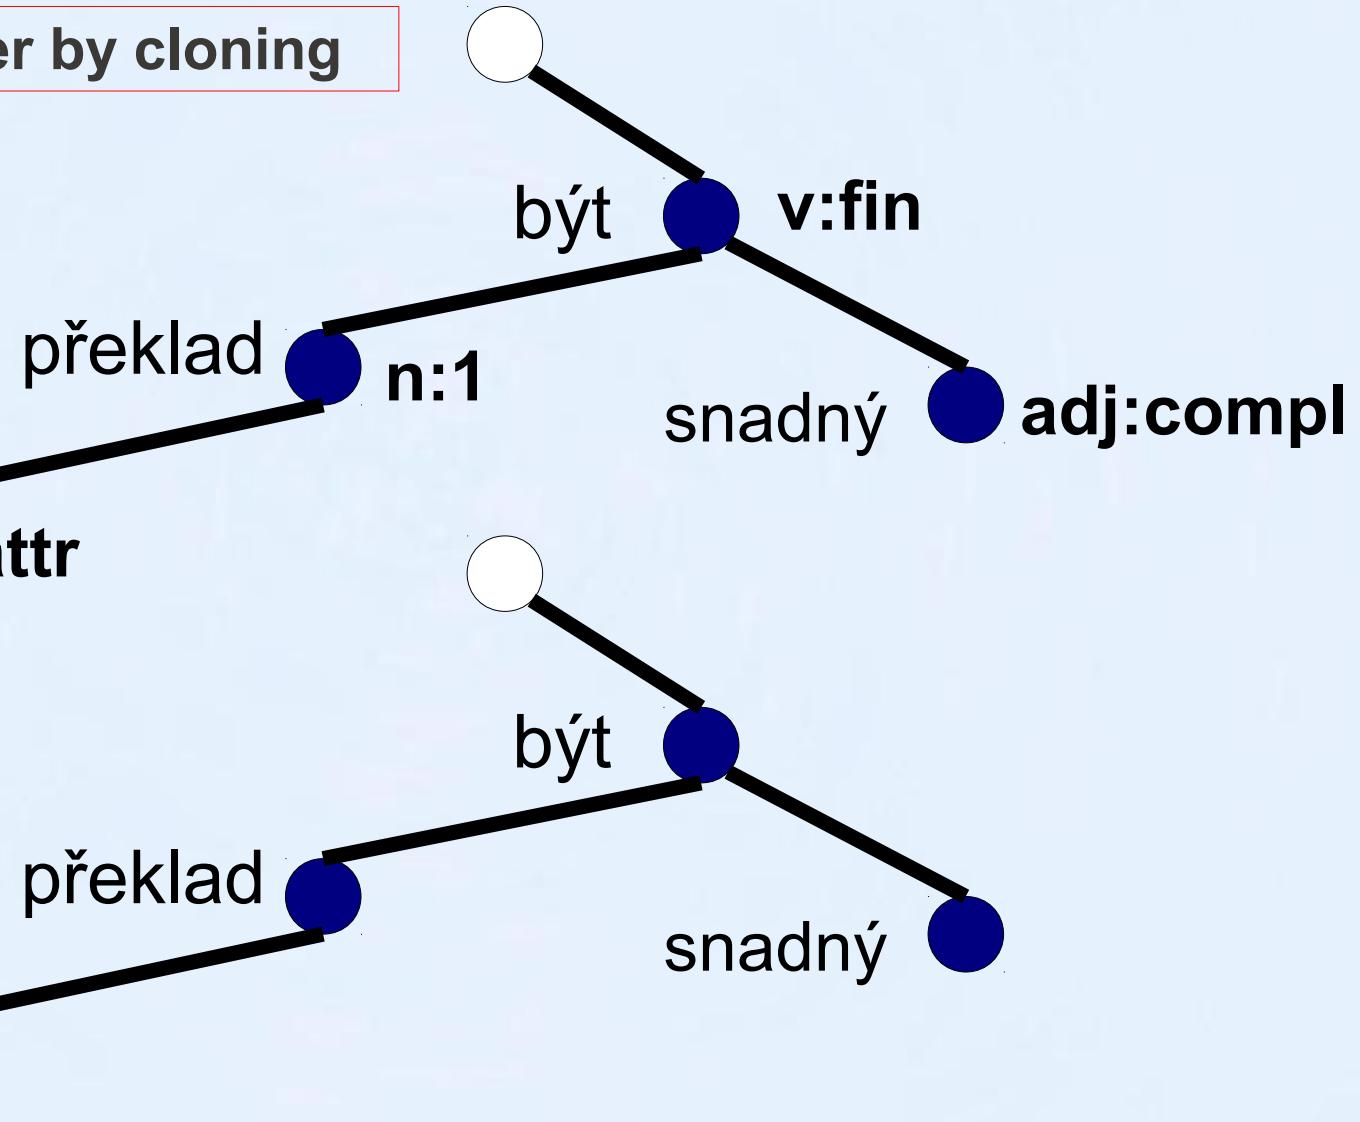

Demo Translation – Synthesis



Fill morphological categories

target t-layer

strojový adj:attr

target a-layer

strojový
degree = positive

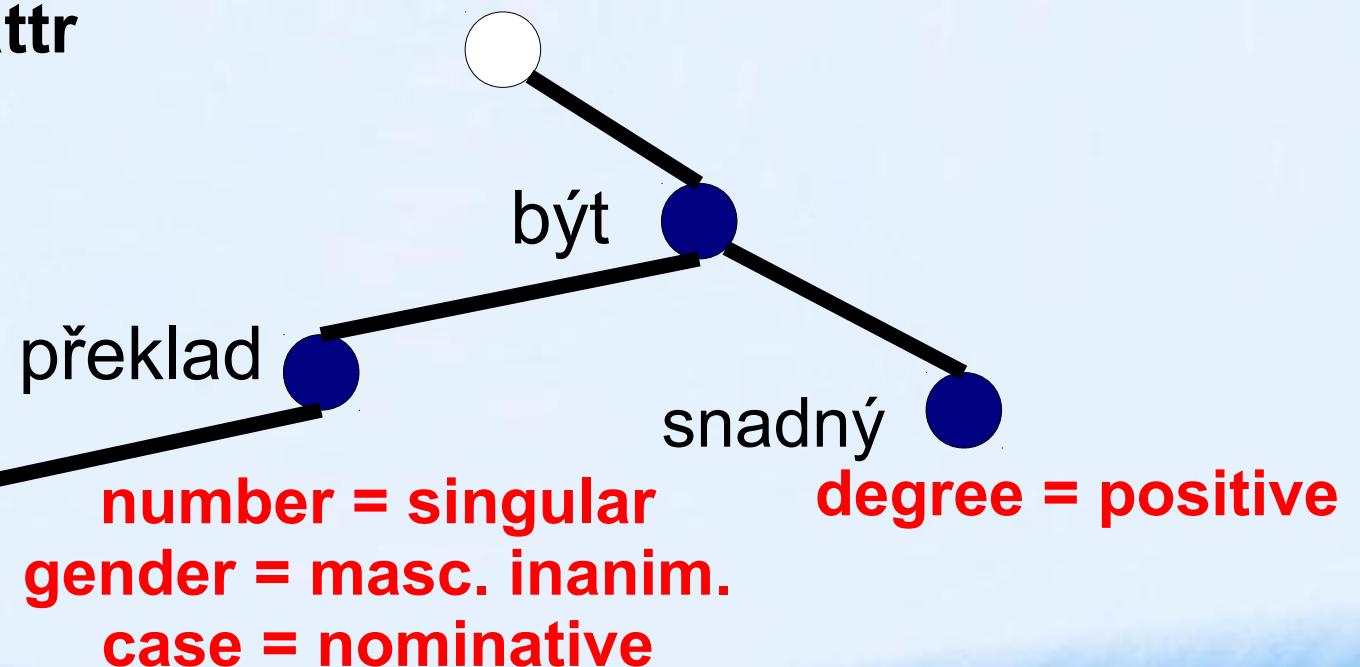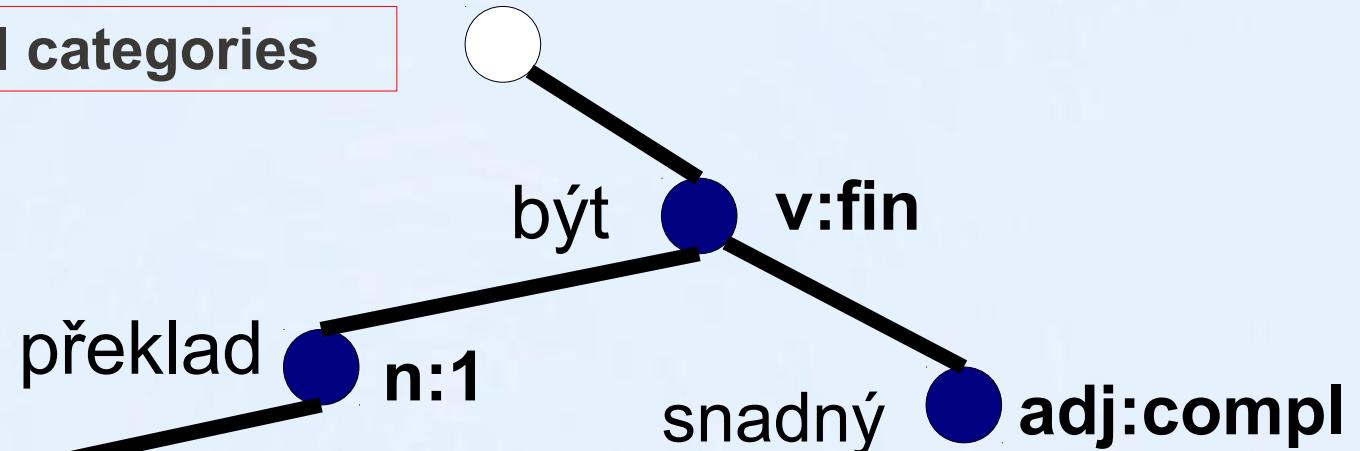

Demo Translation – Synthesis

Impose agreement



target t-layer

strojový adj:attr

target a-layer

number = singular
case = nominative
gender = masc. inanim.

strojový
degree = positive

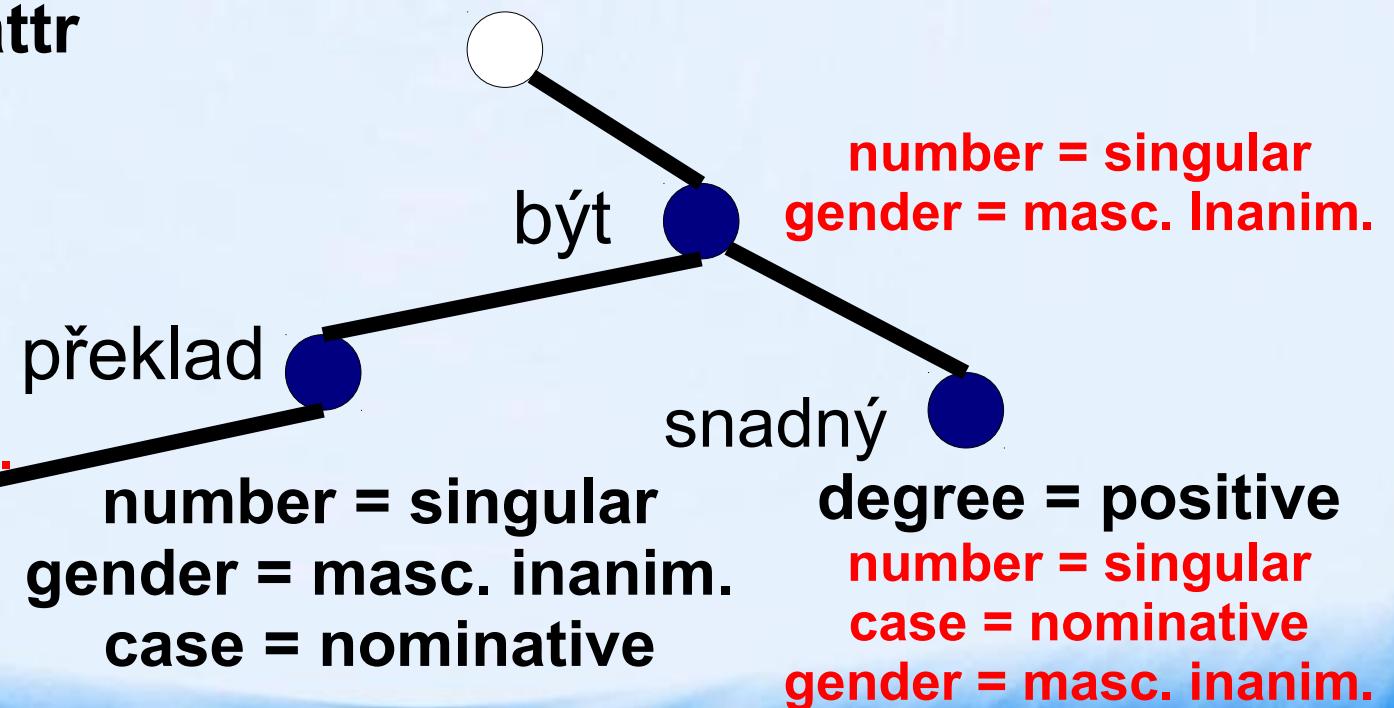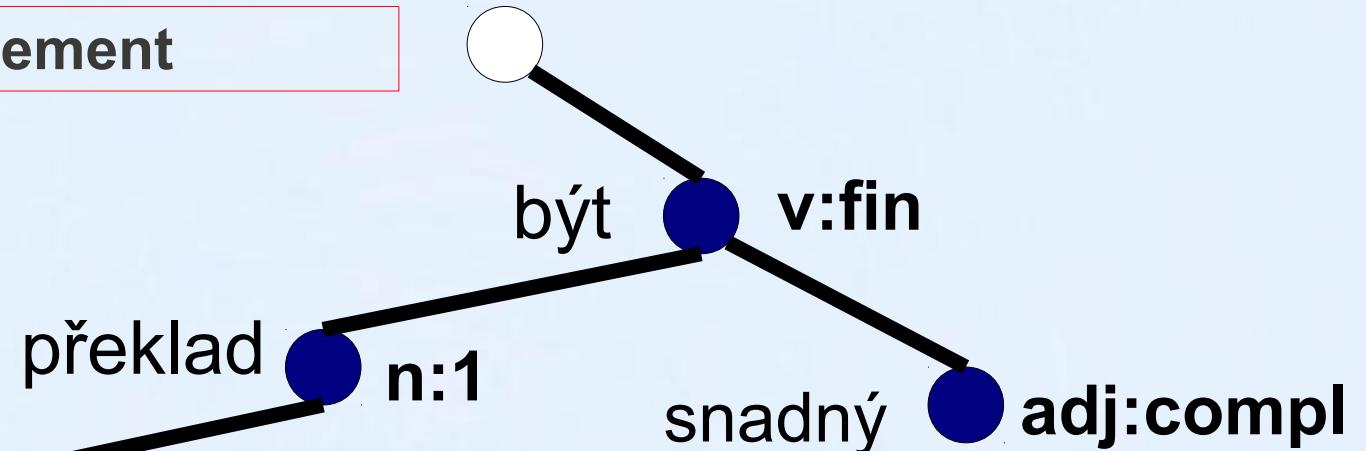

Demo Translation – Synthesis


Add functional words

target t-layer

strojový adj:attr

target a-layer

strojový

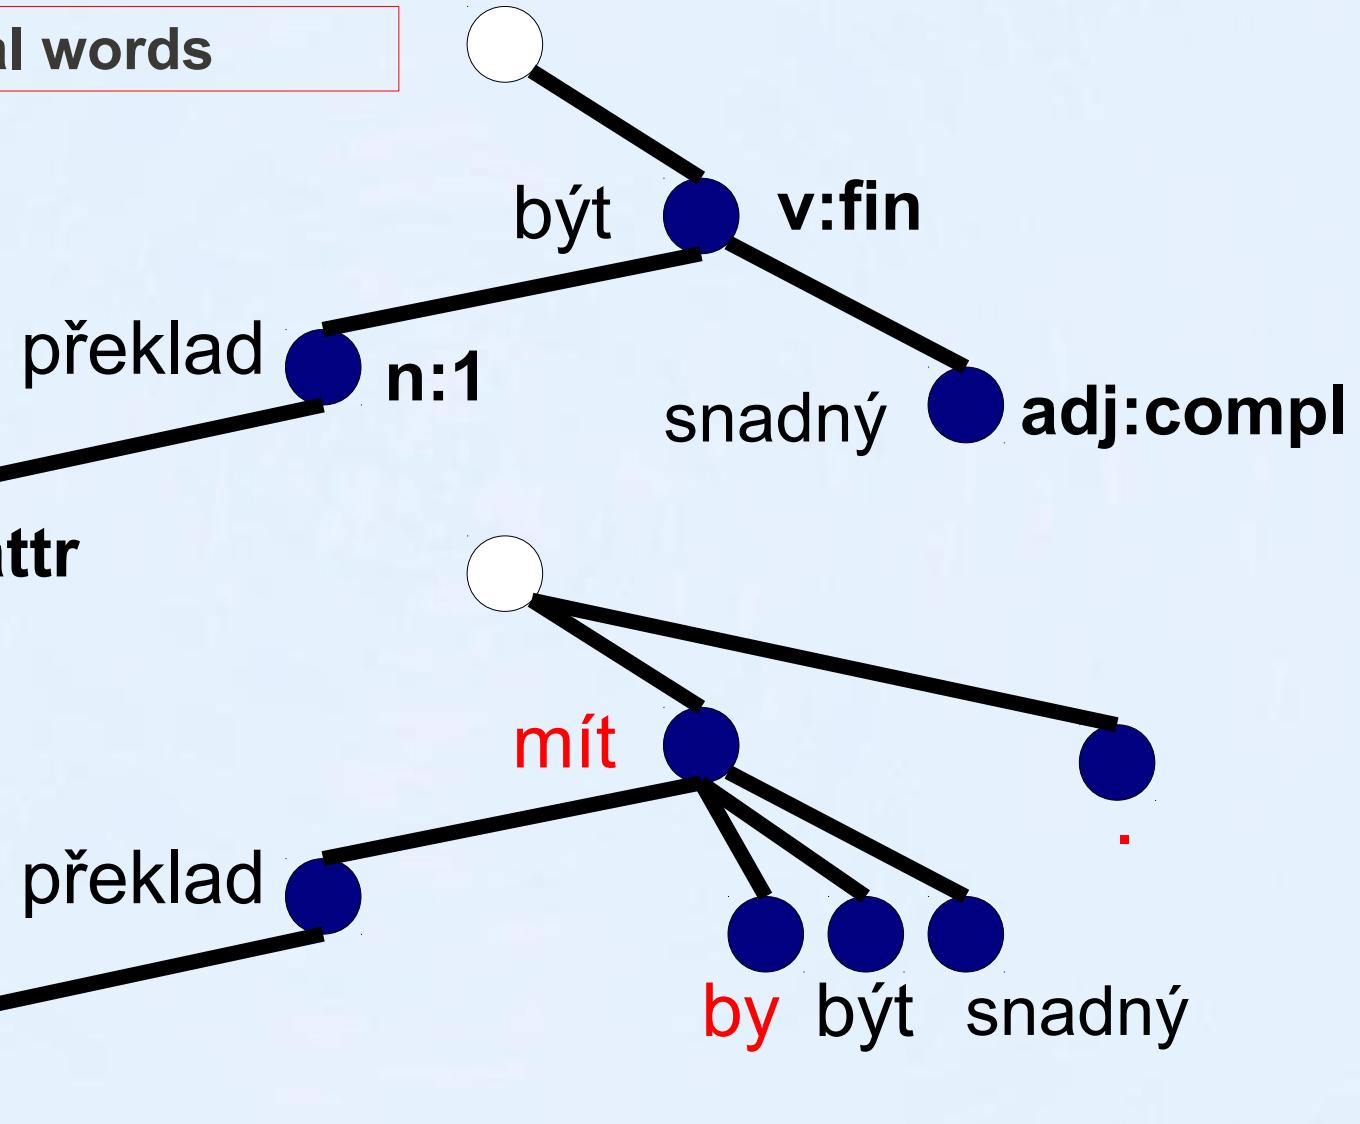

Demo Translation – Synthesis


Reorder clitics

target t-layer

strojový adj:attr

target a-layer

strojový

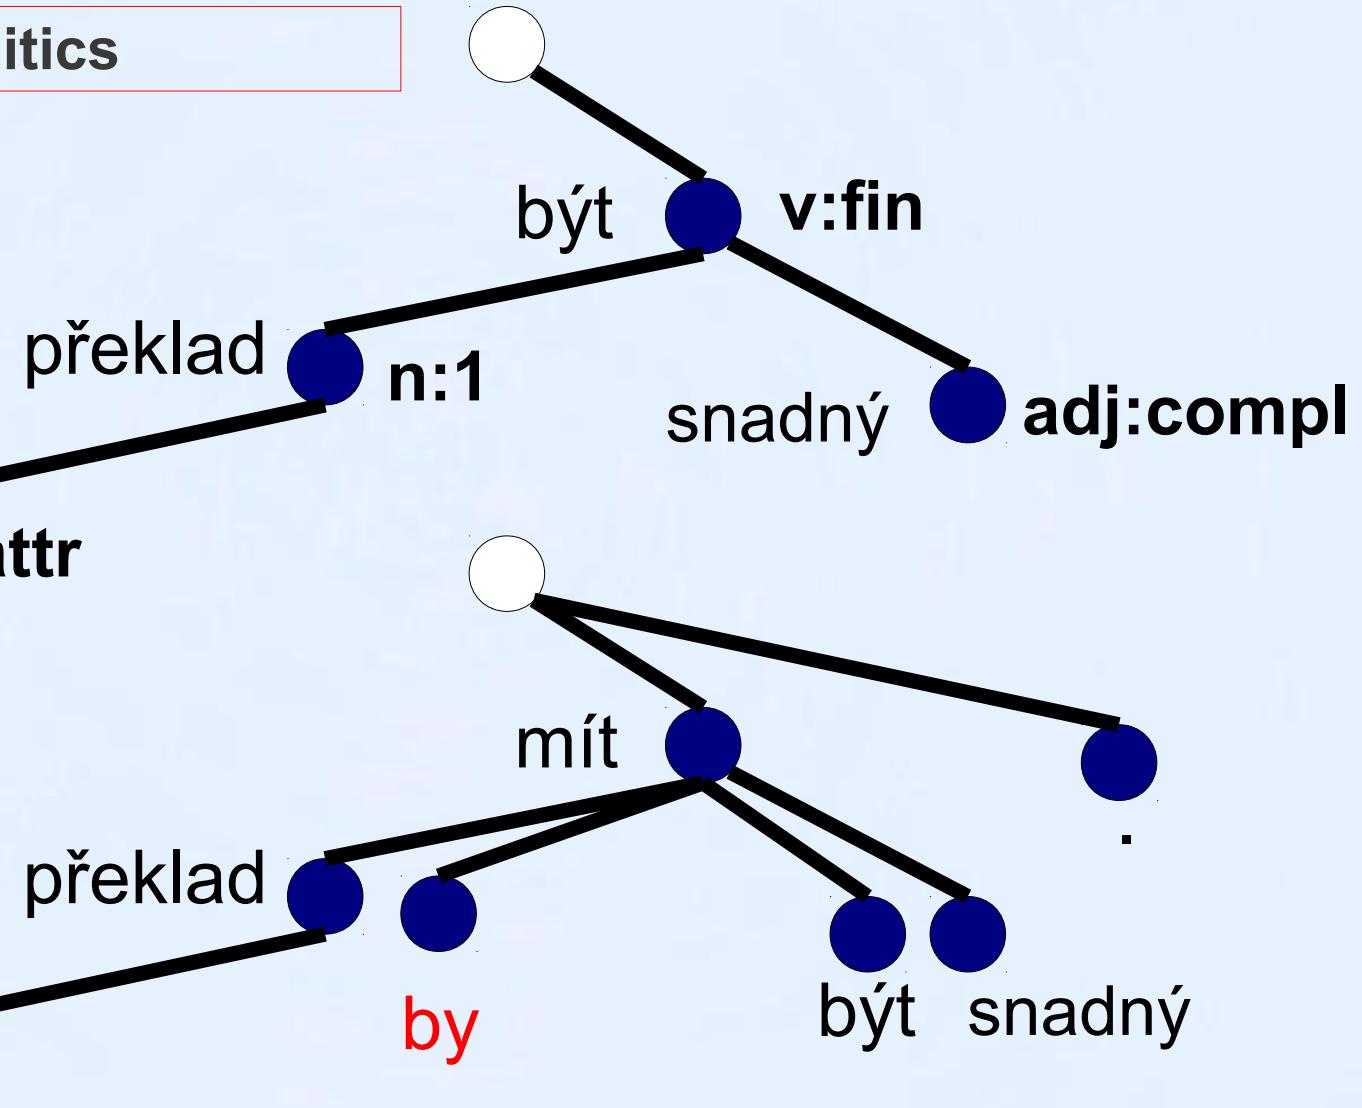

Demo Translation – Synthesis


Generate wordforms

target t-layer

strojový adj:attr

target a-layer

strojový

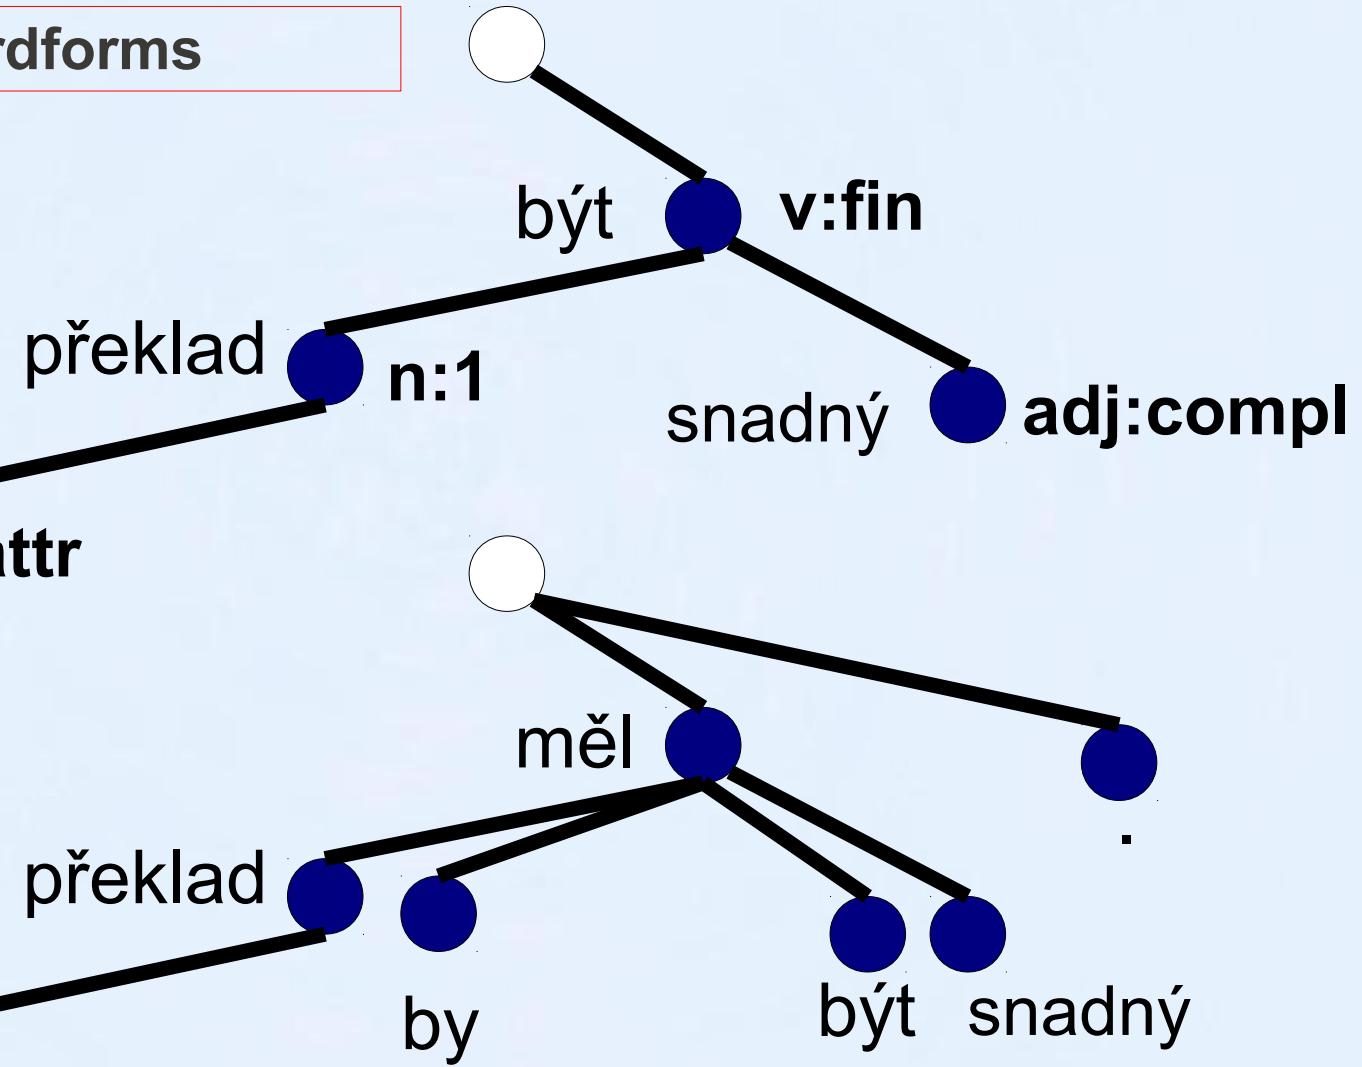

Demo Translation – Synthesis


Concatenate tokens for output

target t-layer

strojový adj:attr

target a-layer

strojový

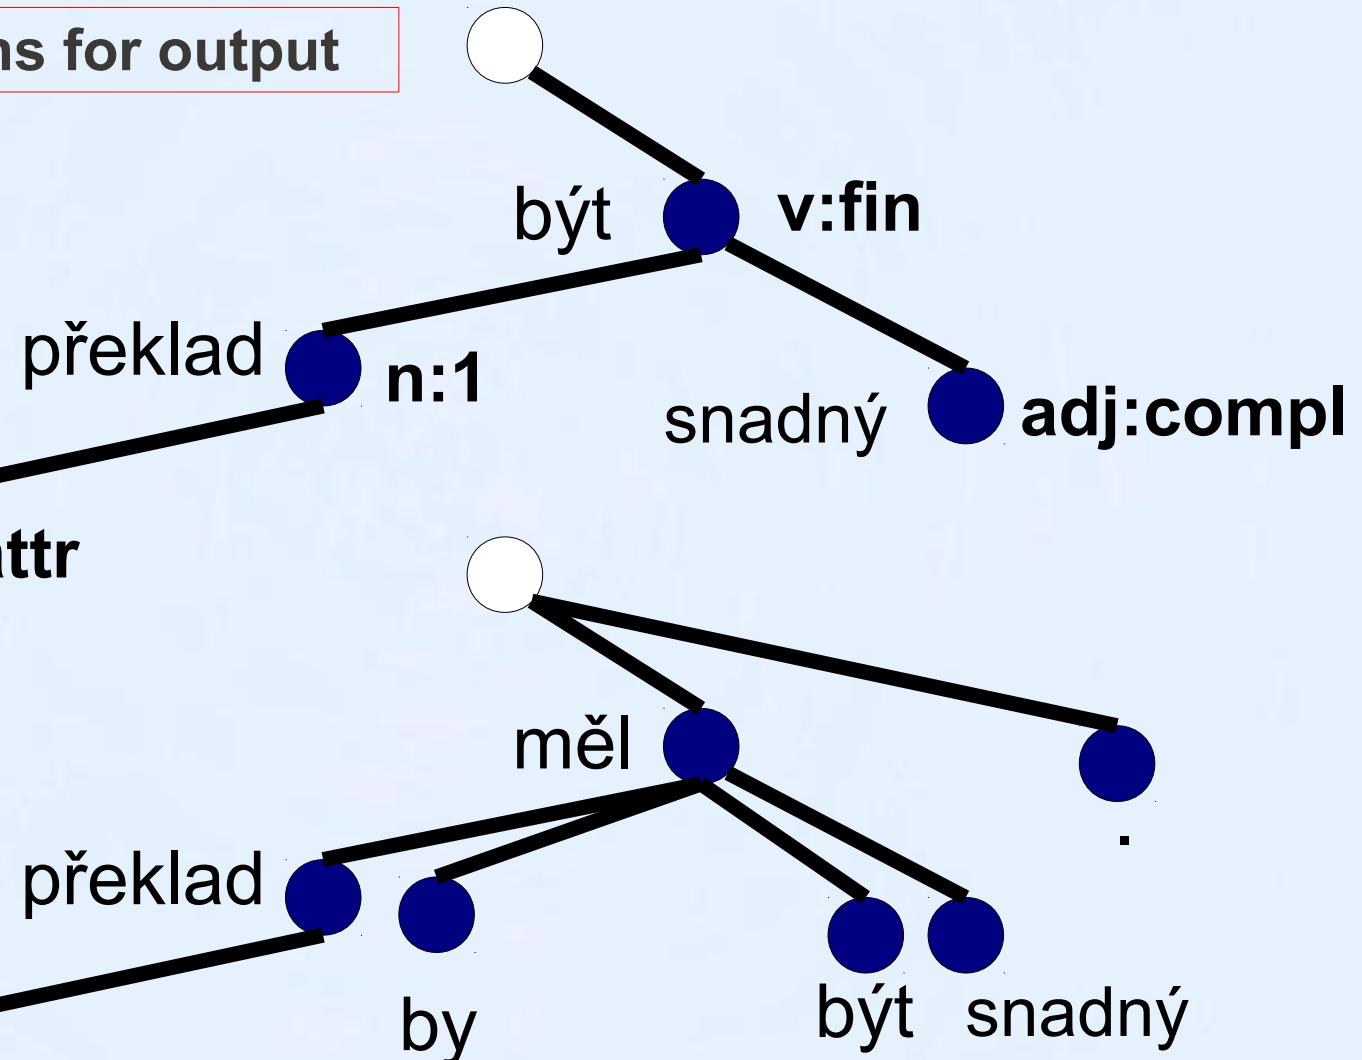

Strojový překlad by měl být snadný.

Demo Translation – Real Scenario

MORPHOLOGY:

ResegmentSentences

Tokenize

NormalizeForms

FixTokenization

TagMorce

FixTags

Lemmatize

NAMED ENTITIES:

StanfordNamedEntities

DistinguishPersonalNames

A-LAYER:

MarkChunks

ParseMST

SetIsMemberFromDeprel

RehangConllToPdtStyle

FixNominalGroups

FixIsMember

FixAtree

FixMultiwordPrepAndConj

FixDicendiVerbs

SetAfunAuxCPCoord

SetAfun

T-LAYER:

MarkEdgesToCollapse

MarkEdgesToCollapseNeg

BuildTtree

SetIsMember

MoveAuxFromCoordToMembers

FixTlemmas

SetCoapFunctors

FixEitherOr

FixIsMember

MarkClauseHeads

MarkPassives

SetFunctors

MarkInfin

MarkRelClauseHeads

MarkRelClauseCoref

MarkDspRoot

MarkParentheses

SetNodetype

SetGrammatemes

SetFormeme

RehangSharedAttr

SetVoice

FixImperatives

SetIsNameOfPerson

SetGenderOfPerson

AddCorAct

FindTextCoref

TRANSFER:

CopyTtree

TrLFPhrases

TrLFJointStatic

DeleteSuperfluousTnodes

TrFTryRules

TrFAddVariants

TrFRerank

TrLTtryRules

TrLAddVariants

TrLFNumeralsByRules

TrLFilterAspect

TransformPassiveConstructions

PrunePersonalNameVariants

RemoveUnpassivizableVariants

TrLFCcompounds

CutVariants

RehangToEffParents

TrLFTreeViterbi

RehangToOrigParents

CutVariants

FixTransferChoices

ReplaceVerbWithAdj

DeletePossPronBeforeVlastni

TrLFemaleSurnames

AddNounGender

MarkNewRelClauses

AddRelpronBelowRc

ChangeCorToPersPron

AddPersPronBelowVfin

AddVerbAspect

FixDateTime

FixGrammatemesAfterTransfer

FixNegation

MoveAdjsBeforeNouns

MoveGenitivesRight

MoveRelClauseRight

MoveDicendiCloserToDsp

MovePersPronNextToVerb

MoveEnoughBeforeAdj

MoveJesteBeforeVerb

FixMoney

OverridePpWithPhraseTr

FindGramCorefForRefIpron

NeutPersPronGenderFromAntec

ValencyRelatedRules

SetClauseNumber

TurnTextCorefToGramCoref

SYNTHESIS TO A-LAYER:

CopyTtree

DistinguishHomonymous.

ReverseNumberNounDep.

InitMorphcat

FixPossessiveAdjs

MarkSubject

ImposePronZAgr

ImposeRelPronAgr

ImposeSubjpredAgr

ImposeAttrAgr

ImposeComplAgr

DropSubjPersProns

AddPrepos

AddSubconjs

AddReflexParticles

AddAuxVerbCompoundPassive

AddAuxVerbModal

AddAuxVerbCompoundFuture

AddAuxVerbConditional

AddAuxVerbCompoundPast

AddClausalExpletivePronouns

ResolveVerbs

ProjectClauseNumber

AddParentheses

AddSentFinalPunct

AddSubordClausePunct

AddCoordPunct

AddAppositionPunct

ChooseMlemmaForPersPron

GenerateWordforms

MoveCliticsToWackernagel

DeleteSuperfluousPrepos

DeleteEmptyNouns

VocalizePrepos

CapitalizeSentStart

CapitalizeNamedEntities.

FillTagFromMorphcat

SYNTHESIS TO TEXT:

ConcatenateTokens

ApplySubstitutions

DetokenizeUsingRules


RemoveRepeatedTokens

NormalizePunctuationForWMT

Annotation of Translation Errors

sample of 250 sentences, 1463 errors in total

Type	lemma, formeme, gram., w. order, ...
Subtype	gram: gender, person, tense, ...
Seriousness	serious, minor
Circumstances	coordination, named entity, numbers
Source	tok, lem, tagger, parser, tecto, trans , x , syn , ?

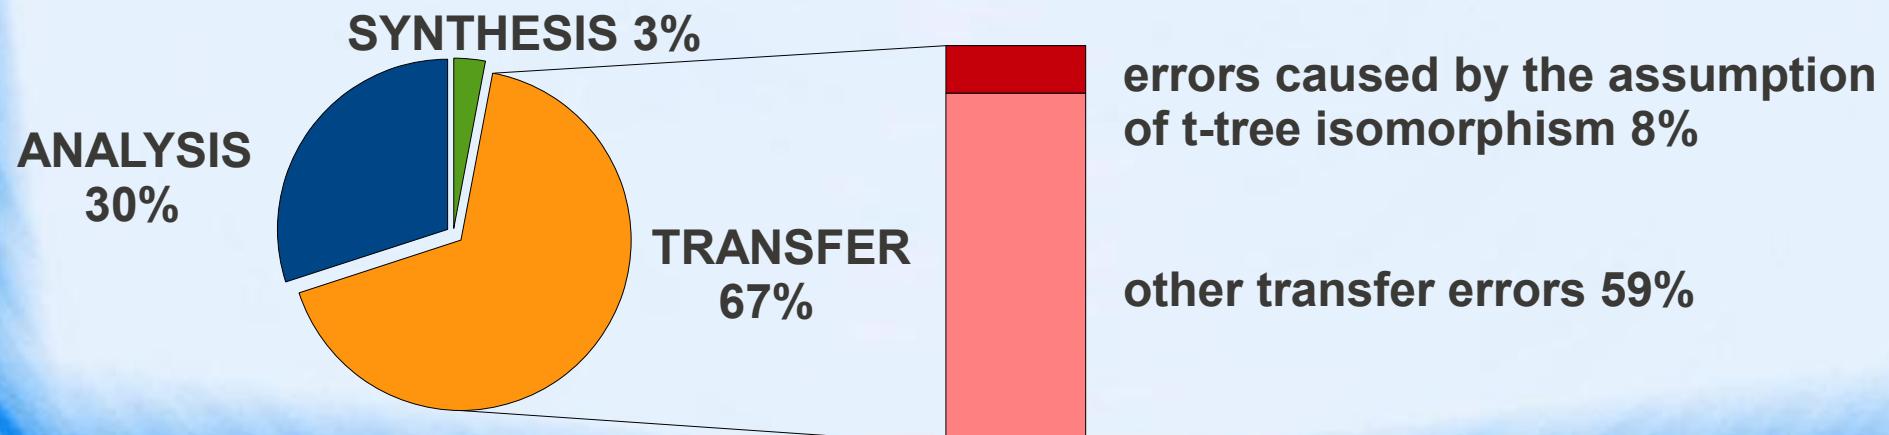

HMTM – Motivation

Select the best combination
of lemmas and formems

source t-layer

machine

target t-layer

počítač
stroj
strojový

translation

n:2
n:attr
adj:attr

překlad
převod

n:1

be

být

mít

v:fin

v:fin

v:inf

snadný
jednoduchý

adj:compl
n:1
adv:

easy

adj:compl

HMTM – Motivation

Select the best label
for each node

source t-layer


translation
n:subj

machine **n:attr**

target t-layer

překlad|**n:1**,
převod|**n:1**


počítač|**n:2**,
počítač|**n:attr**,
strojový|**adj:attr**, ...

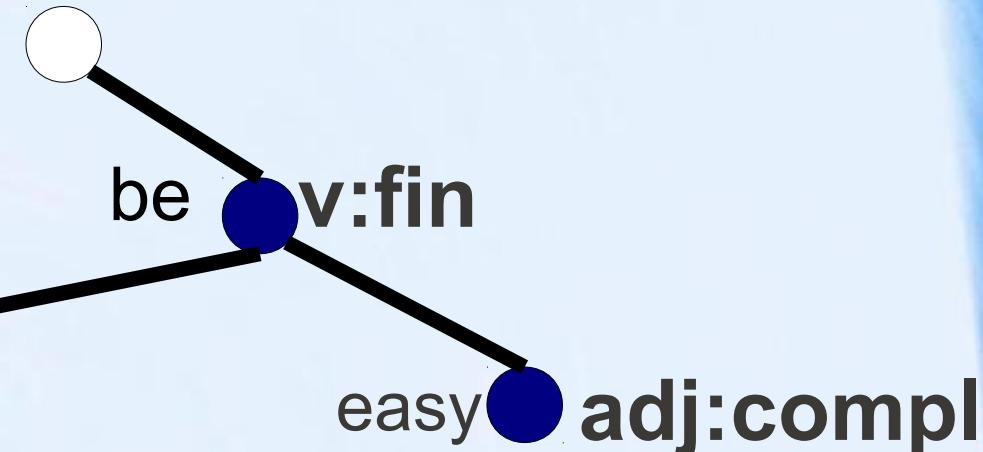

**být|v:fin, být|v:inf,
mít|v:fin, mít|v:inf**

**snadný|adj:compl,
jednoduchý|adj:compl, ...**

HMTM in MT

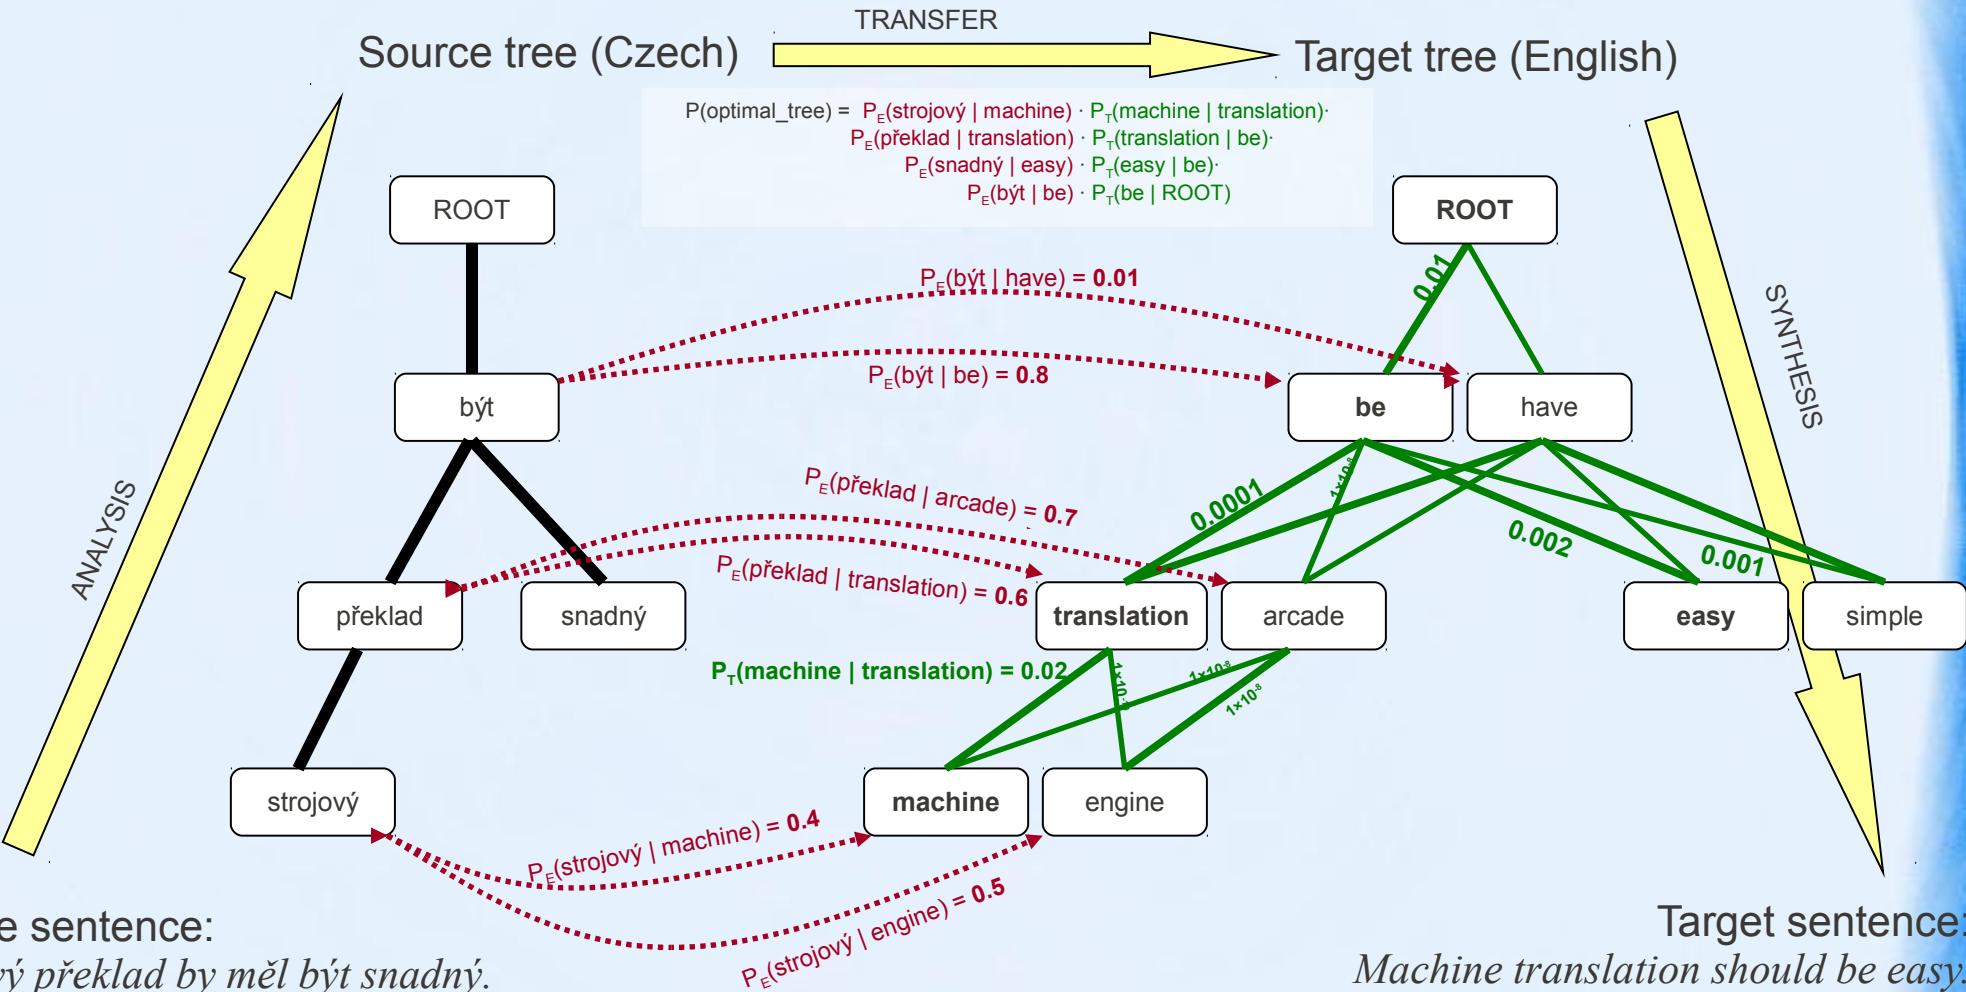


$P_E(\text{source} \mid \text{target}) \dots$ emission probabilities ... **translation model**

$P_T(\text{dependent} \mid \text{governing}) \dots$ transition probabilities ... **target-language tree model**


Combining Dictionaries

- new general interface (for lemmas and formems)
`$dict->get_translations($input_label, $features)`
returns a list of translation variants including probabilities
- OOP style, dictionary constructor can take another dictionary (or more) as a parameter → hierarchy
- Four basic types of dictionaries:
 - Static plain** loaded from a file „lemma → lemma“
 - Context** loaded from a file „lemma,features → lemma“
 - Derivational** translations derived dynamically, input dictionary
 - Combinational** combination of more input dictionaries


Hierarchy of lemma dictionaries

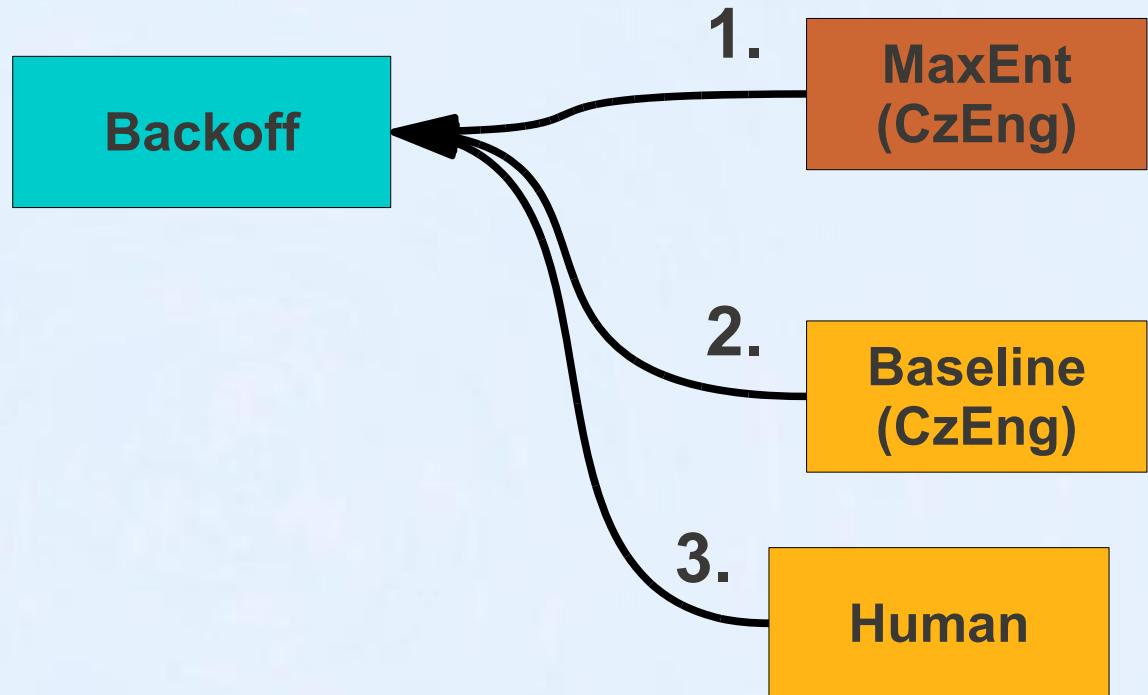

Hierarchy of lemma dictionaries

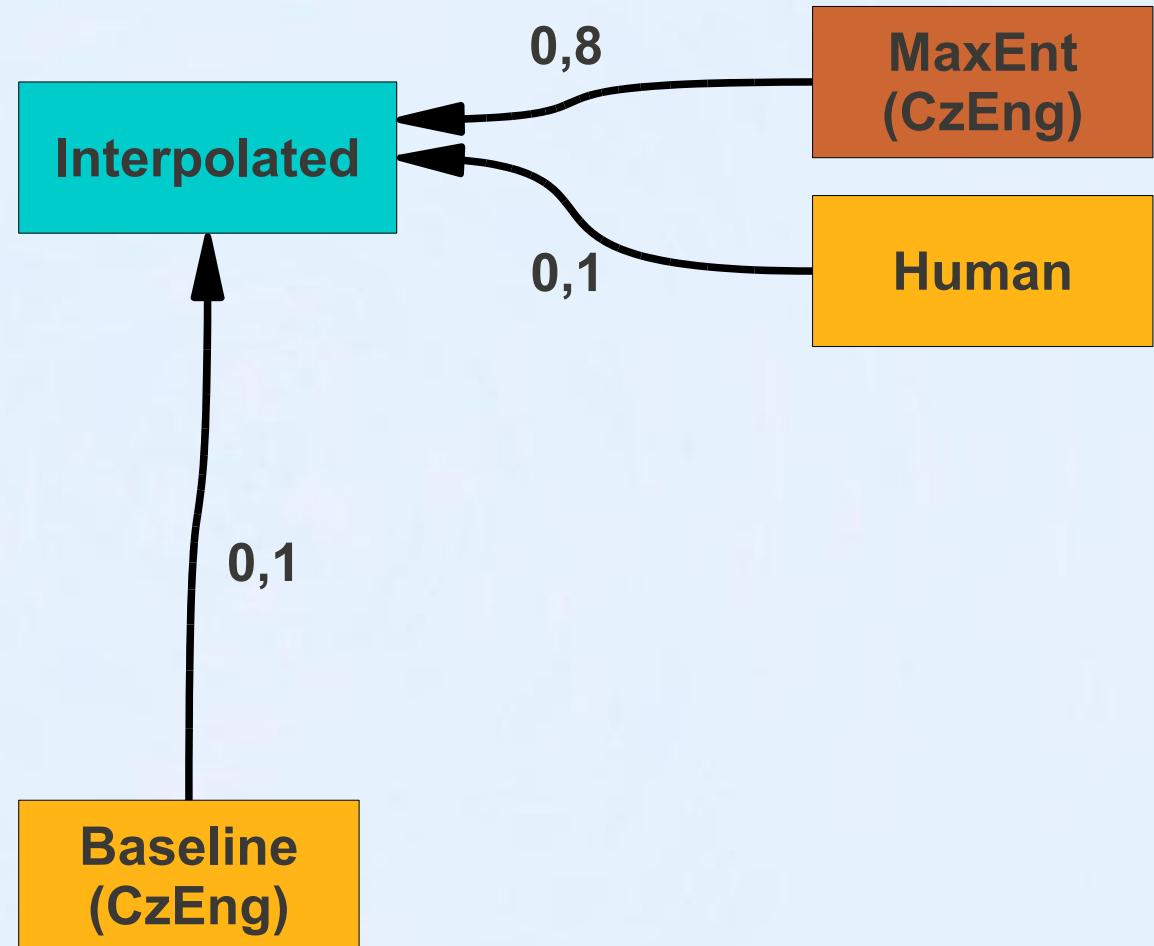


Hierarchy of lemma dictionaries

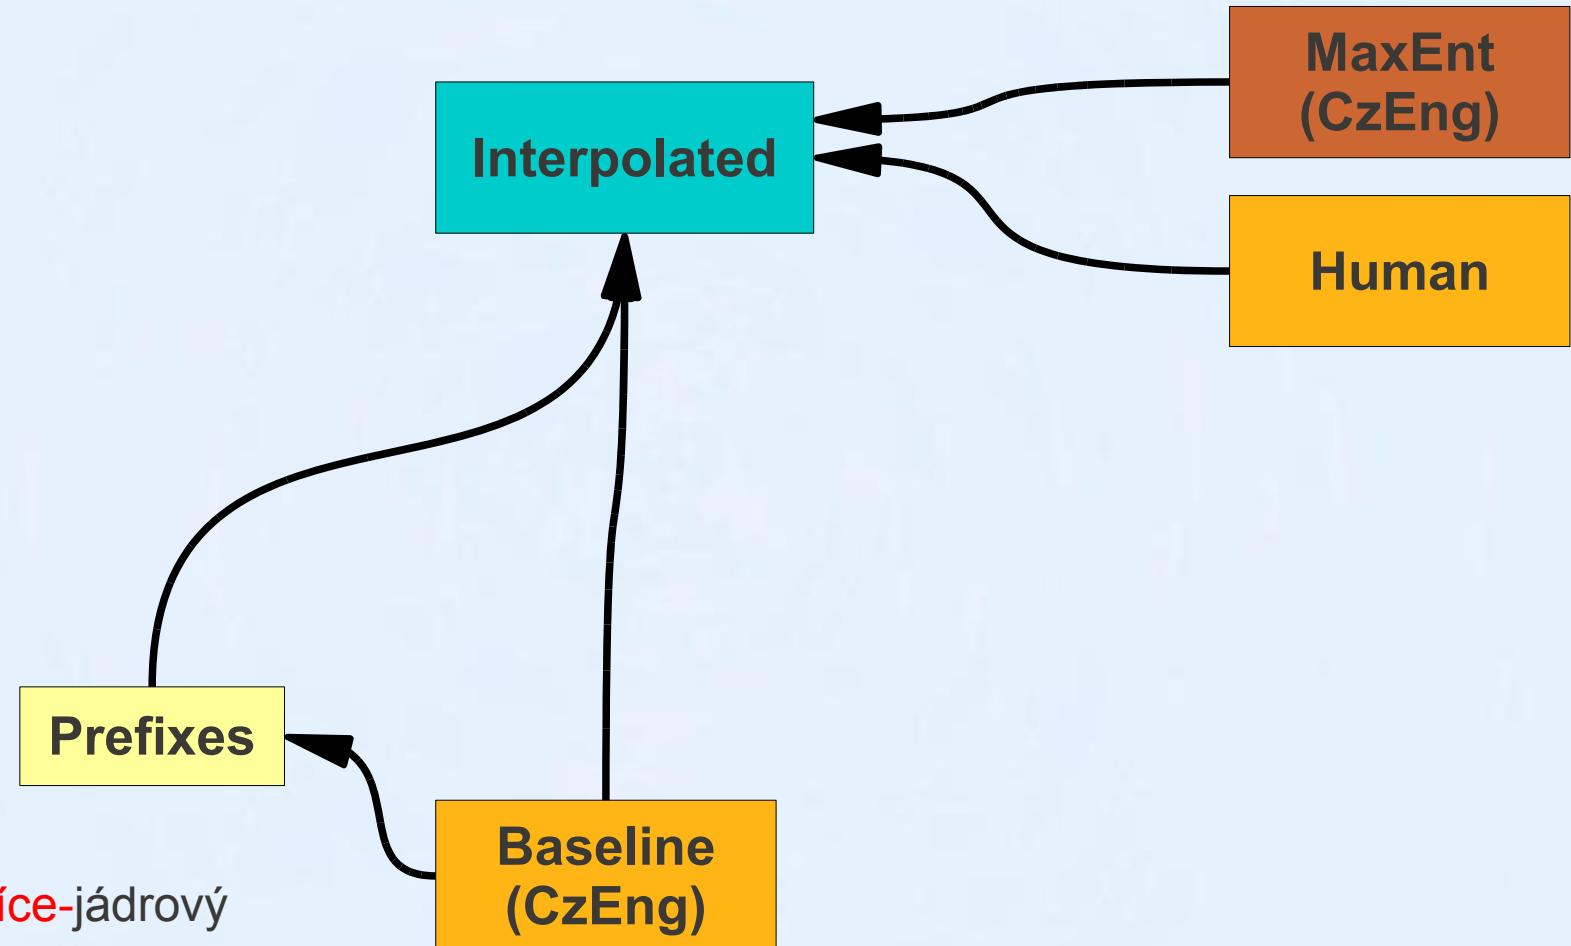


multi-core → více-jádrový
více-jádro
multi-jádrový
multi-jádro


Hierarchy of lemma dictionaries

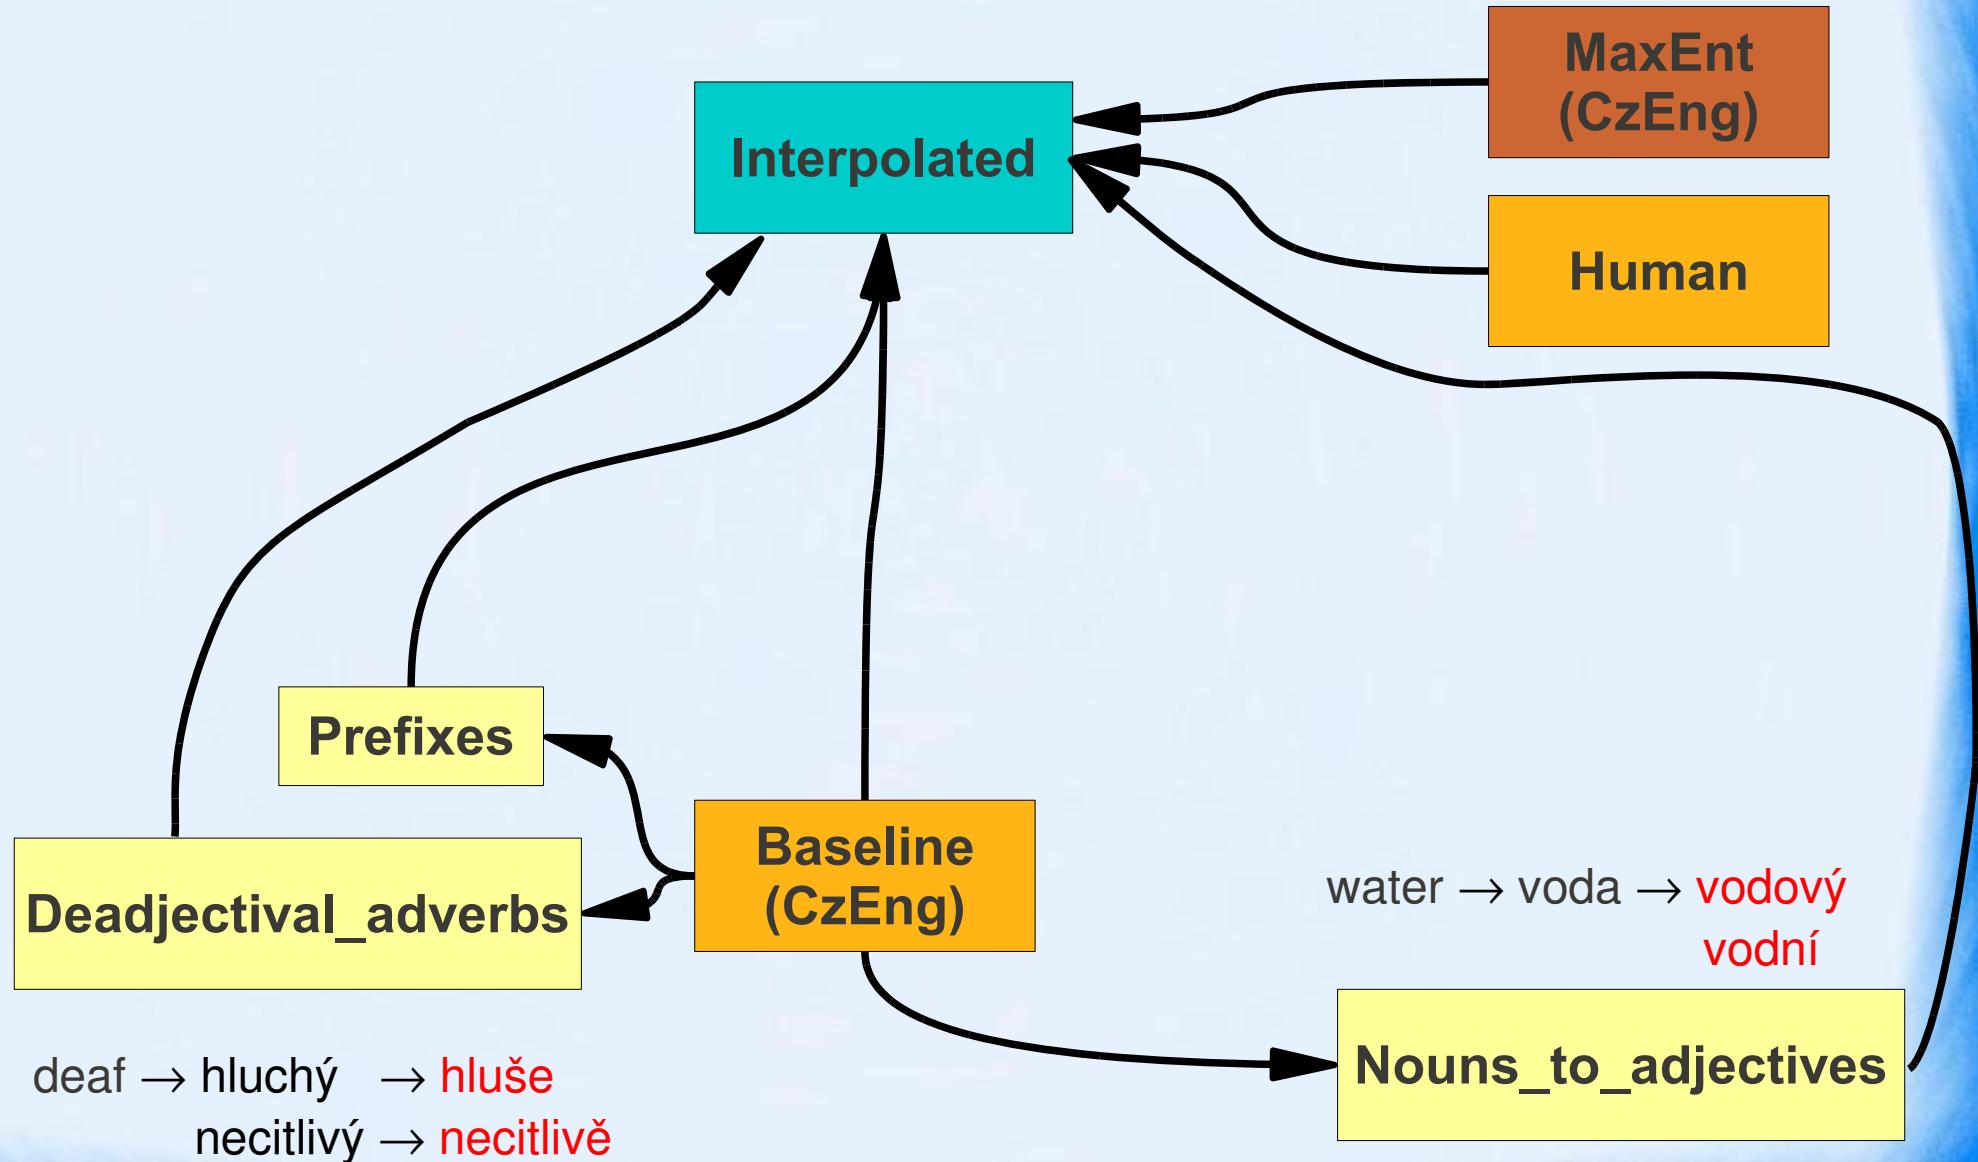

Hierarchy of lemma dictionaries

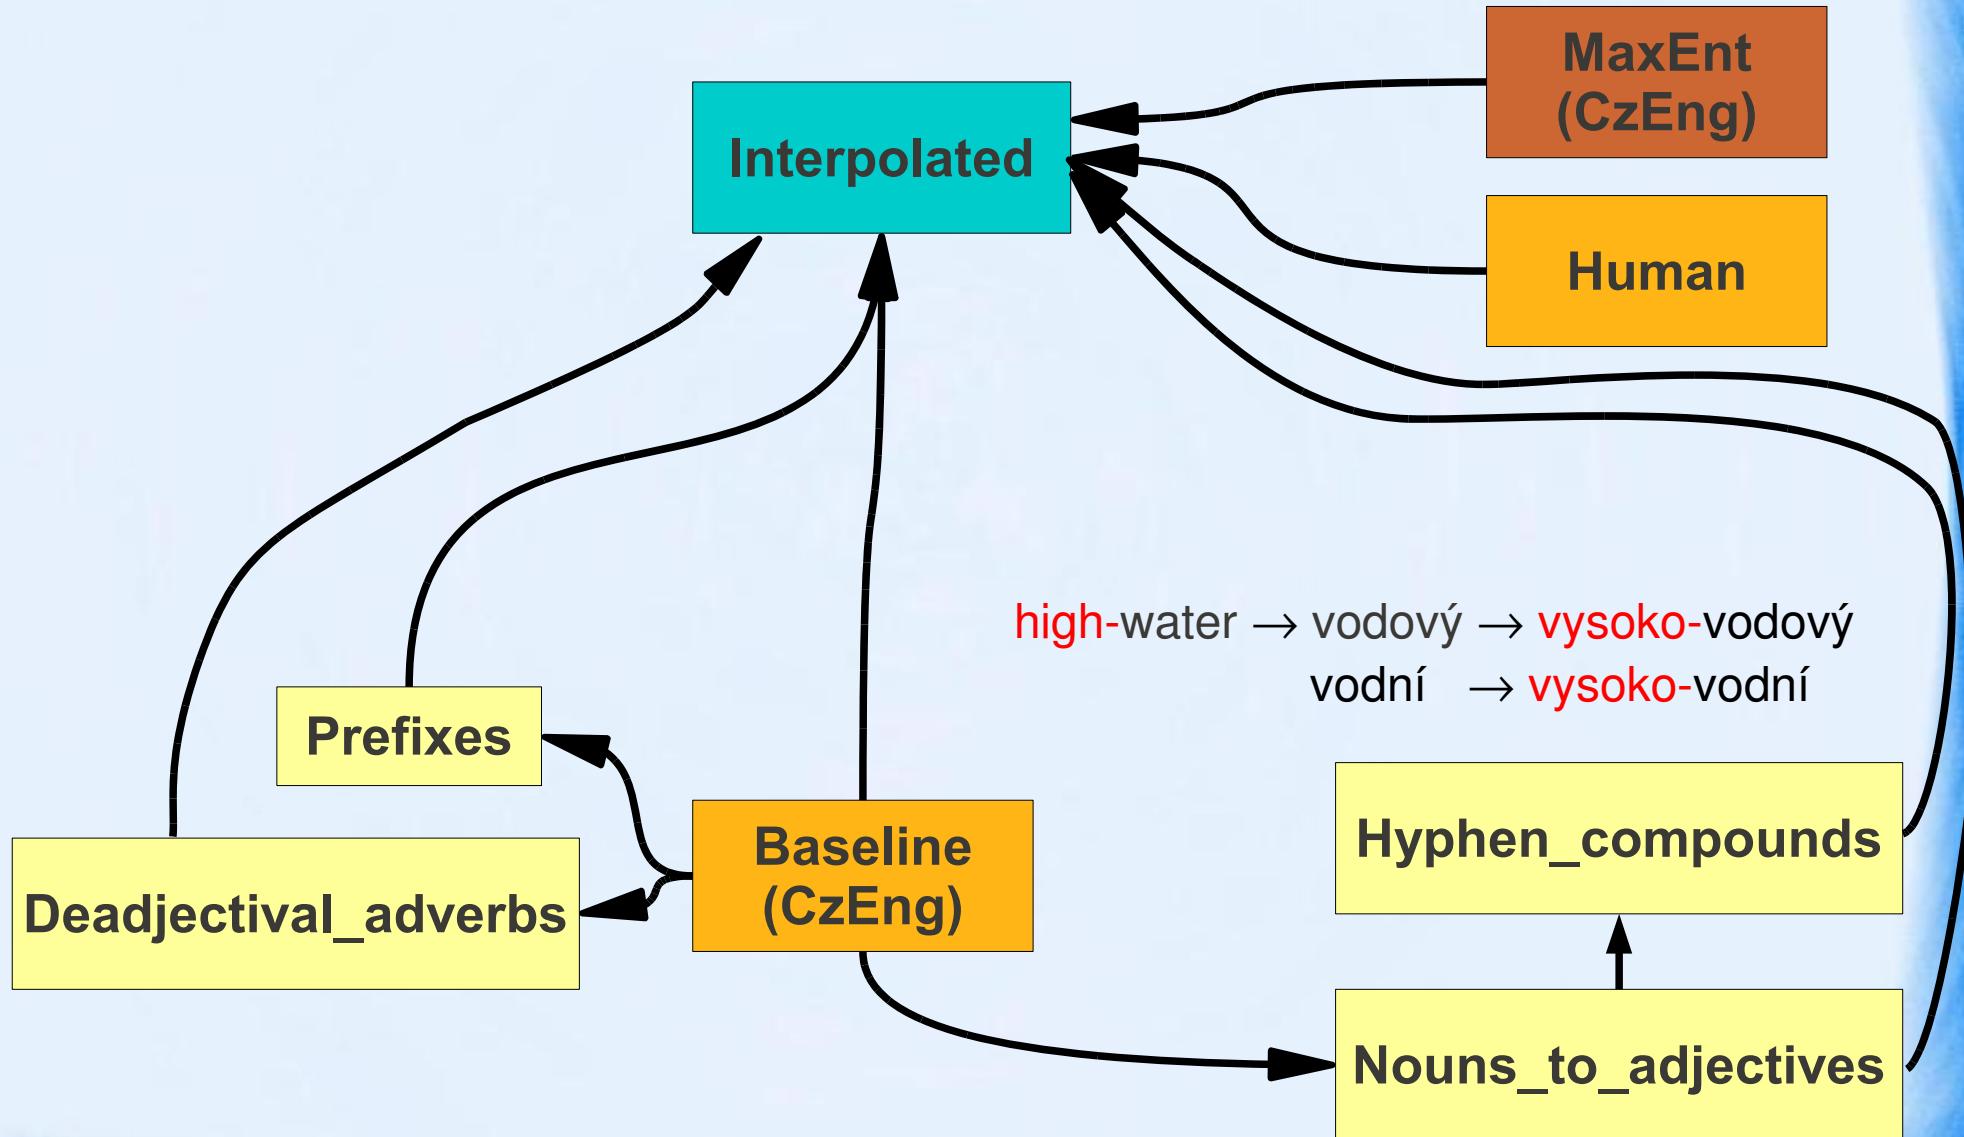

Hierarchy of lemma dictionaries

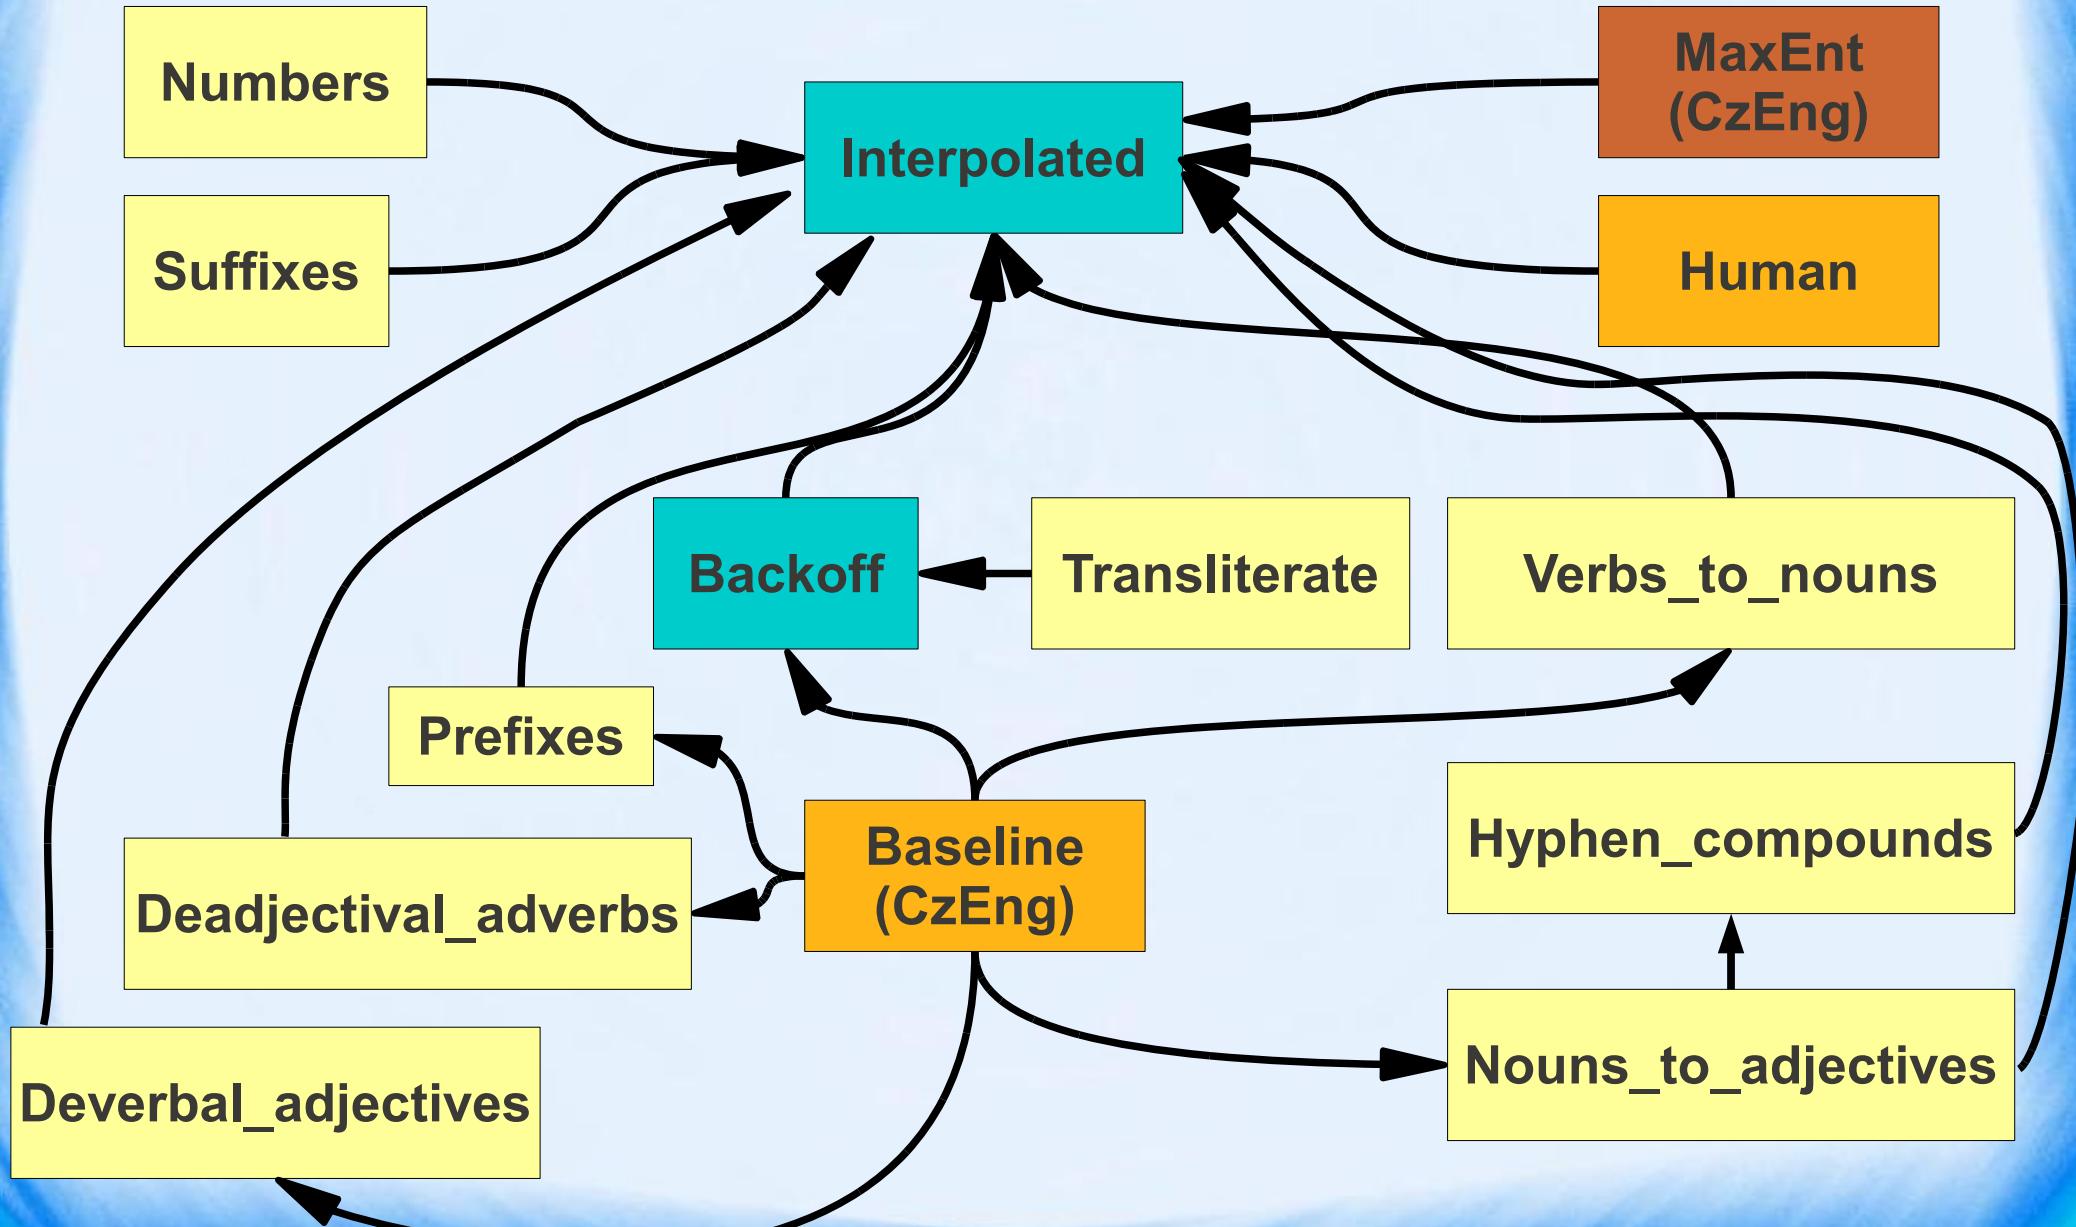

Maximum Entropy Dictionary

Baseline Dictionary

$$p(y|x) = \frac{\text{count}(x, y)}{\text{count}(x)}$$


- Maximum likelihood estimates (from the training sections of CzEng 0.9)
- Pruned by thresholds on $p(x|y)$ and $p(y|x)$
- No context used
 x = source lemma
 y = target lemma

MaxEnt Dictionary

$$p(y|x) = \frac{1}{Z(x)} \exp \sum_i \lambda_i f_i(x, y)$$

- One MaxEnt model for each source lemma (same training data as for the Baseline Dict.)
- Interpolated with Baseline Dict. (due to pruning)
- Context features used (x = source context)
 - local tree context
 - local linear context
 - morphological & syntactic categories
 - ...

Maximum Entropy Dictionary

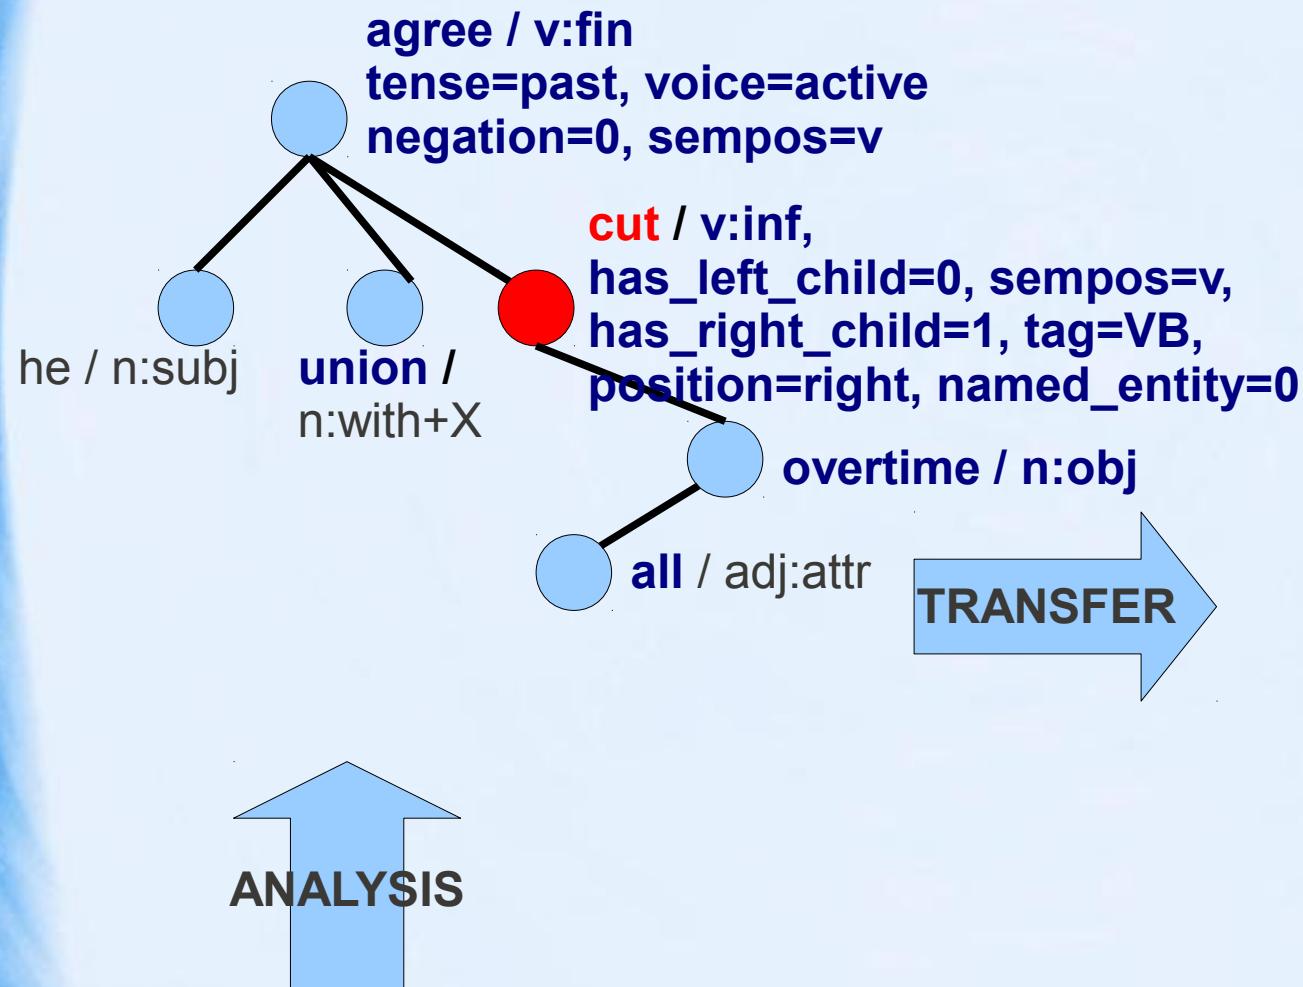

He agreed with the unions to cut all overtime.

Dohodl se s odbory na zrušení všech přesčasů.

Examples of Translation (2009)


A miss by an inch
is a miss by a mile.

Slečna palec je slečna miliónu.



I'd rather be a hammer
than a nail.

Spíše bych byl kladivo než nehét.

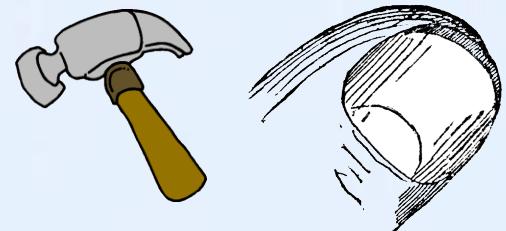


A bird in the hand is worth
two in the bush.

Pták v ruce je cenný
dvakrát v Bushovi.



Example of Translation (2011)

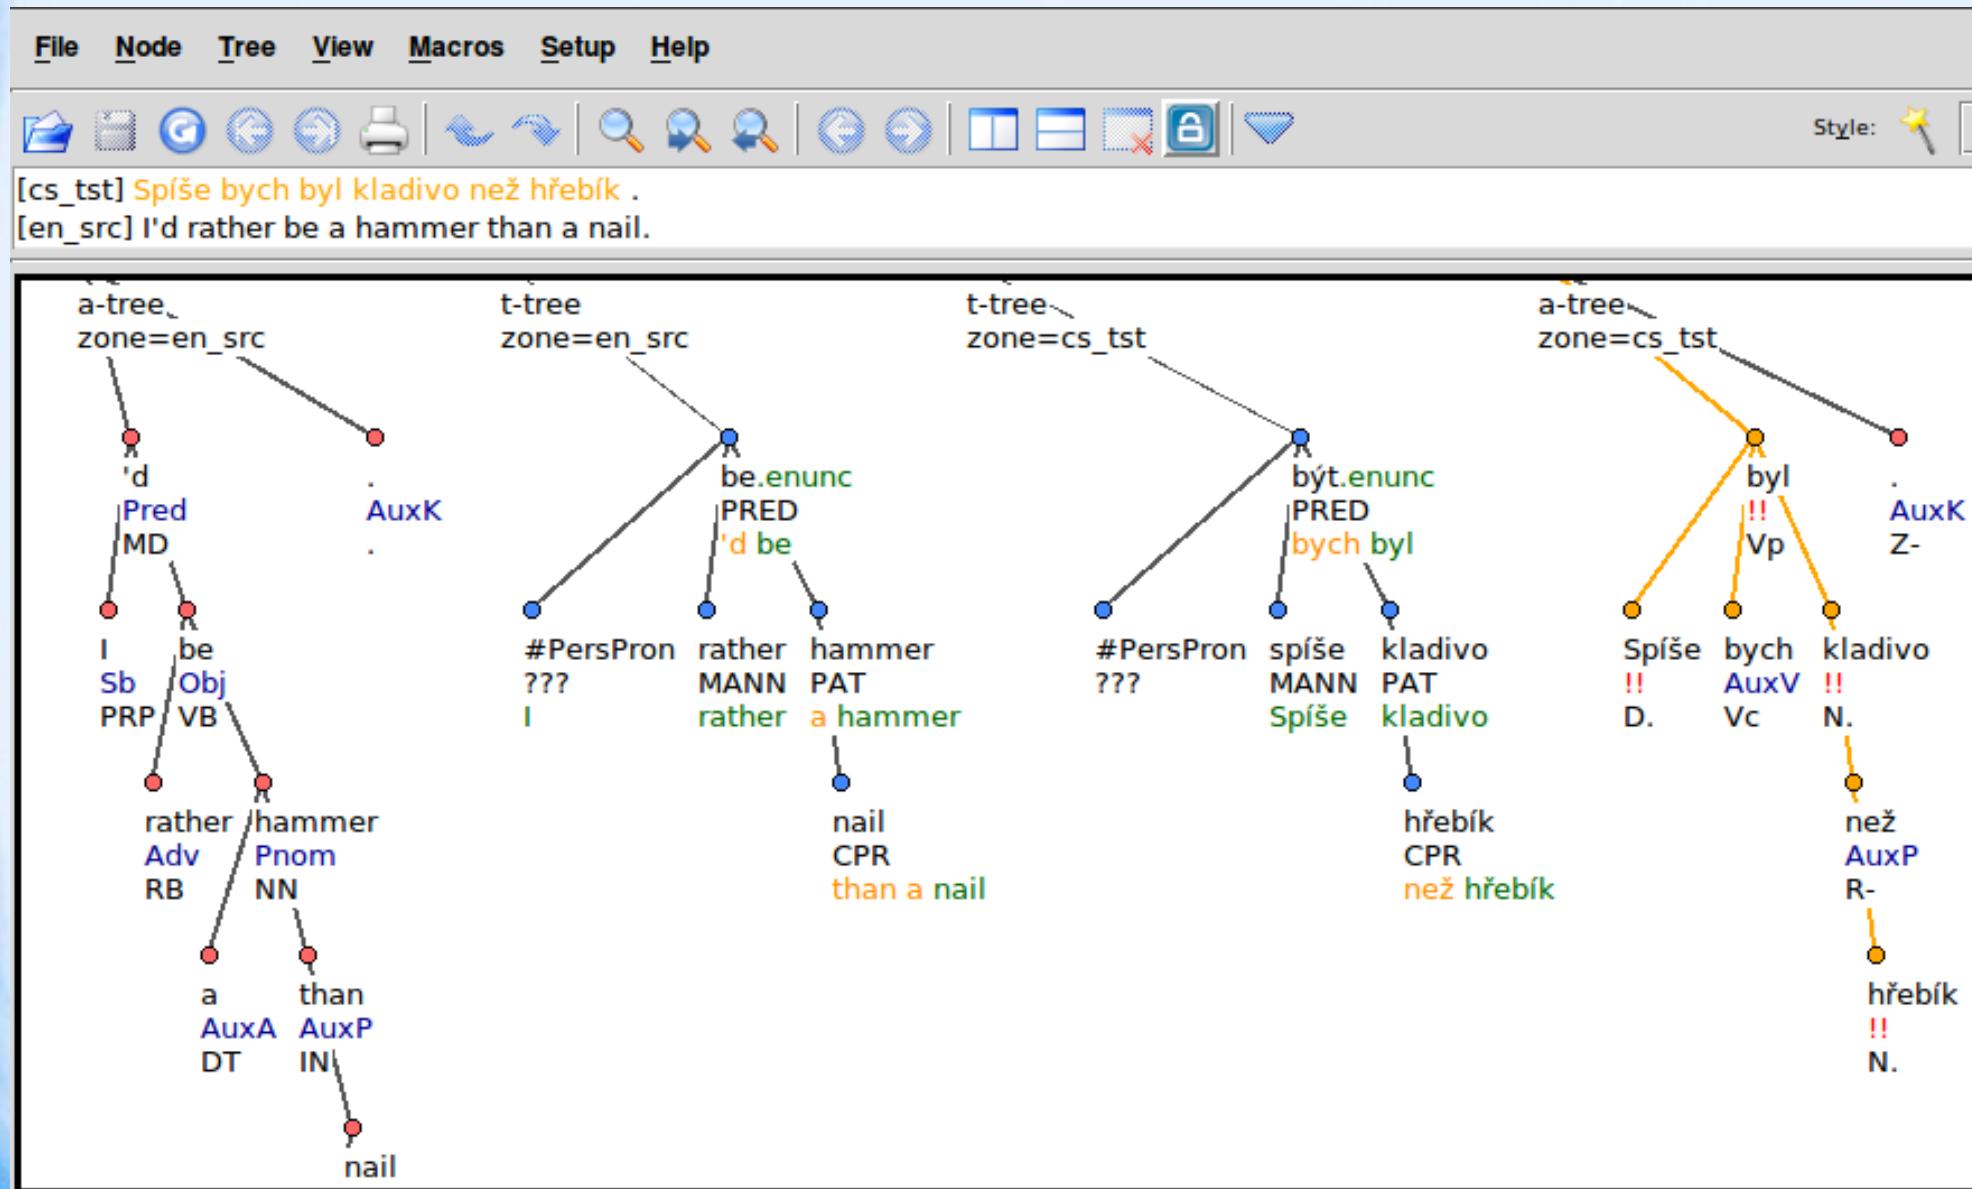

Sample of MaxEnt Features

input_label=nail

output_label=hřebík#N (metal nail)

child_formeme_n:in+X=1	1.64483855116042
is_member=1	1.30042900630692
child_formeme_v:fin=1	1.04422203176176
next_node_tlemma=down	0.838961007712912
is_capitalized=1	0.792130821958927
position=right	0.747785245407306
tense_g=post	0.744919903760696
voice_g=active	0.659489975893991
prev_node_tlemma=drive	0.655357850937254
parent_capitalized=1	0.622953832124697
formeme=n:from+X	0.599348506643414
prev_node_tlemma=hammer	0.592276691427986
child_tlemma_few=1	0.553464629114697
child_tlemma_remove=1	0.546698831608057
sempos=n.denot	0.504719359514573
next_node_tlemma=and	0.502529618088752
formeme_g=v:until+fin	0.491064112122981
child_tlemma_rusty=1	0.428884558837039
tag_g=VBP	0.422967377093101
next_node_tlemma=screw	0.344701934524519
...	

output_label=nehet#N (fingernail or toenail)

child_formeme_n:poss=1	1.32717038827268
child_tlemma_finger=1	1.07509772743853
child_formeme_n:of+X=1	0.982021327950337
position=left	0.886912864256063
prev_node_tlemma=black	0.770671304450658
child_tlemma_broken=1	0.761077744287099
child_formeme_v:attr=1	0.700099311992958
formeme=n:at+X	0.674547829214778
formeme_g=n:attr	0.673367412957367
child_tlemma_long=1	0.673158400394094
next_node_tlemma=file	0.600496248030202
child_tlemma_false=1	0.584236638145312
prev_node_tlemma=false	0.584236638145312
number=sg	0.563056142428995
formeme=n:obj	0.533943098032196
formeme=n:by+X	0.528852315800188
...	

Cooperation is welcome

- Exploit English a-layer or t-layer for your project (e.g. Extra features/factors for Moses)
- Try your machine learning (CRF, SVM, NN,...) instead of our MaxEnt dictionary
- Suggest a better algorithm for the transfer (treelet → treelet)
- Use SMT for the deep-syntactic transfer (TectoMoses: linearize trees & project dependencies)

Thank you

