

Robust Data-to-text Generation with Pretrained Language Models

Ondřej Dušek

collaboration with Zdeněk Kasner and Ioannis Konstas

DSML Seminar

26.01.2023




Charles University
Faculty of Mathematics and Physics
Institute of Formal and Applied Linguistics



unless otherwise stated

Data-to-text Generation

- **data-to-text NLG** = verbalizing structured outputs
 - RDF triples (=2 entities & relation), tables, dialogue acts ... → text

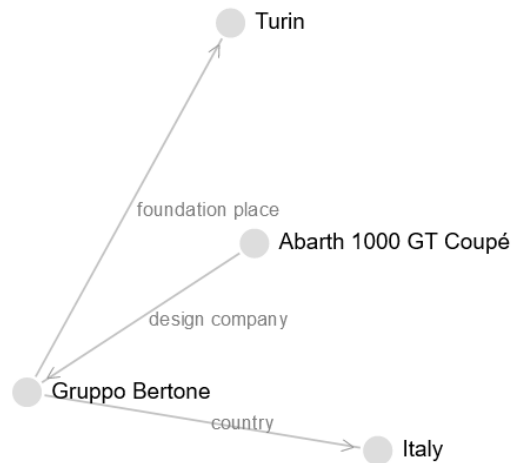

Abarth 1000 GT Coupé | design company | Gruppo Bertone
Gruppo Bertone | foundation place | Turin
Gruppo Bertone | country | Italy



Gruppo Bertone, of Turin Italy, designed the Abarth 1000 GT Coupe.

- main usage:
 - reports based on data (weather, sports...)
 - dialogue systems (Siri/Google/Alexa...)

Team	Win	Loss	Pts	...
Mavericks	31	41	86	...
Raptors	44	29	94	...

Player	AS	RB	PT	...
Patrick Patterson	1	5	14	...
Delon Wright	4	3	8	...
...				...

- *The Toronto Raptors, which were leading at halftime by 10 points (54-44), defeated the Dallas Mavericks by 8 points (94-86).*
- *Patrick Patterson provided 14 points on 5/6 shooting, 5 rebounds, 3 defensive rebounds, 2 offensive rebounds and 1 assist.*

(Kasner et al., 2021) <https://aclanthology.org/2021.inlg-1.25>

Give me the weather in Prague for 22 March

Here's the forecast for Tuesday, the 22nd.

Sunny High 64°
64°F Low 31°
Prague, Czechia
March 22

Bing [See more](#)

Cortana

Neural NLG vs. older methods

- Older methods:

- **templates** – fill in blanks

- most commercial systems still!
 - safe, tried & tested
 - needs handcrafting
 - rules/grammars
 - pipelines of statistical models

name = Blue Spice
eat_type = pub
area = riverside

[name] is a **[eat_type]** in the **[area]** area.




Blue Spice is a **pub** in the **riverside** area.

- Neural models:

- 1 step, **end-to-end**
 - **Train** fully from input-output pairs (no additional rules etc.)
 - Much more **fluent** outputs
 - Needs more training data (~10k range, 10x more than before)
 - Opaque & has **no guarantees on accuracy**

Accuracy in NLG

- **NLG semantic accuracy** (fidelity) = input-output correspondence
- Basic error types:
 - **hallucination** = output not grounded in input
 - extrinsic = information unrelated to the input
 - intrinsic = information conflicting with input, input facts used wrongly
 - **omission** = input not verbalized

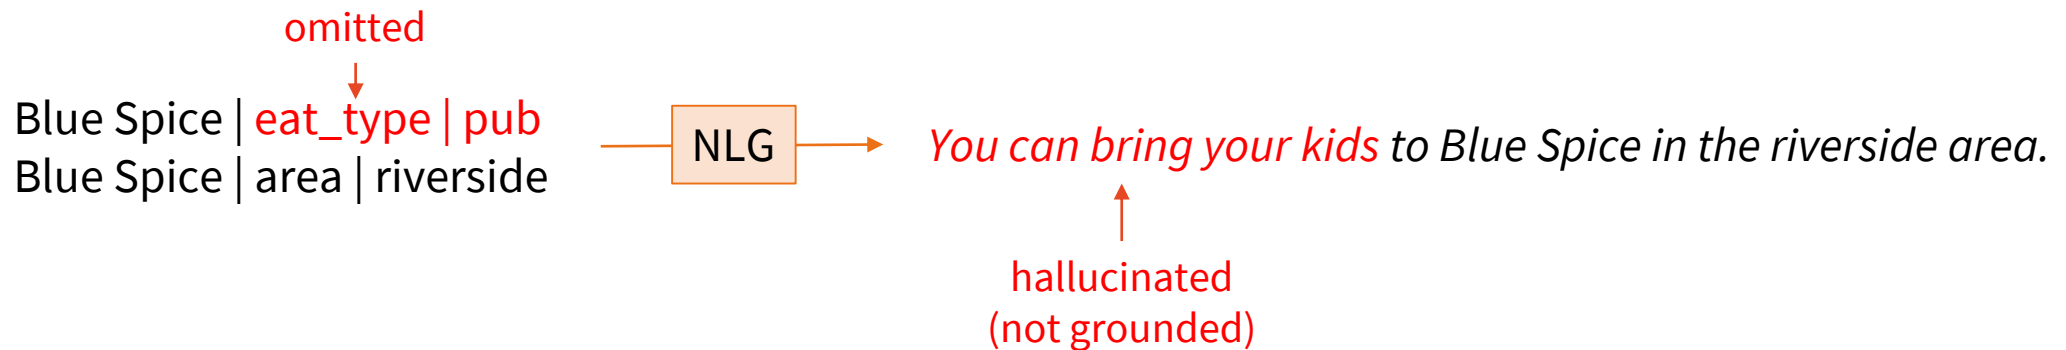


- Approx. measure: logical entailment (NLI)
 - output entailed by data & vice-versa, neural models available (BART-NLI)

Neural NLG: Transformer Models

(Vaswani et al., 2017) <http://arxiv.org/abs/1706.03762>


1) encoder: encode linearized data

2) decoder: decode text word-by-word

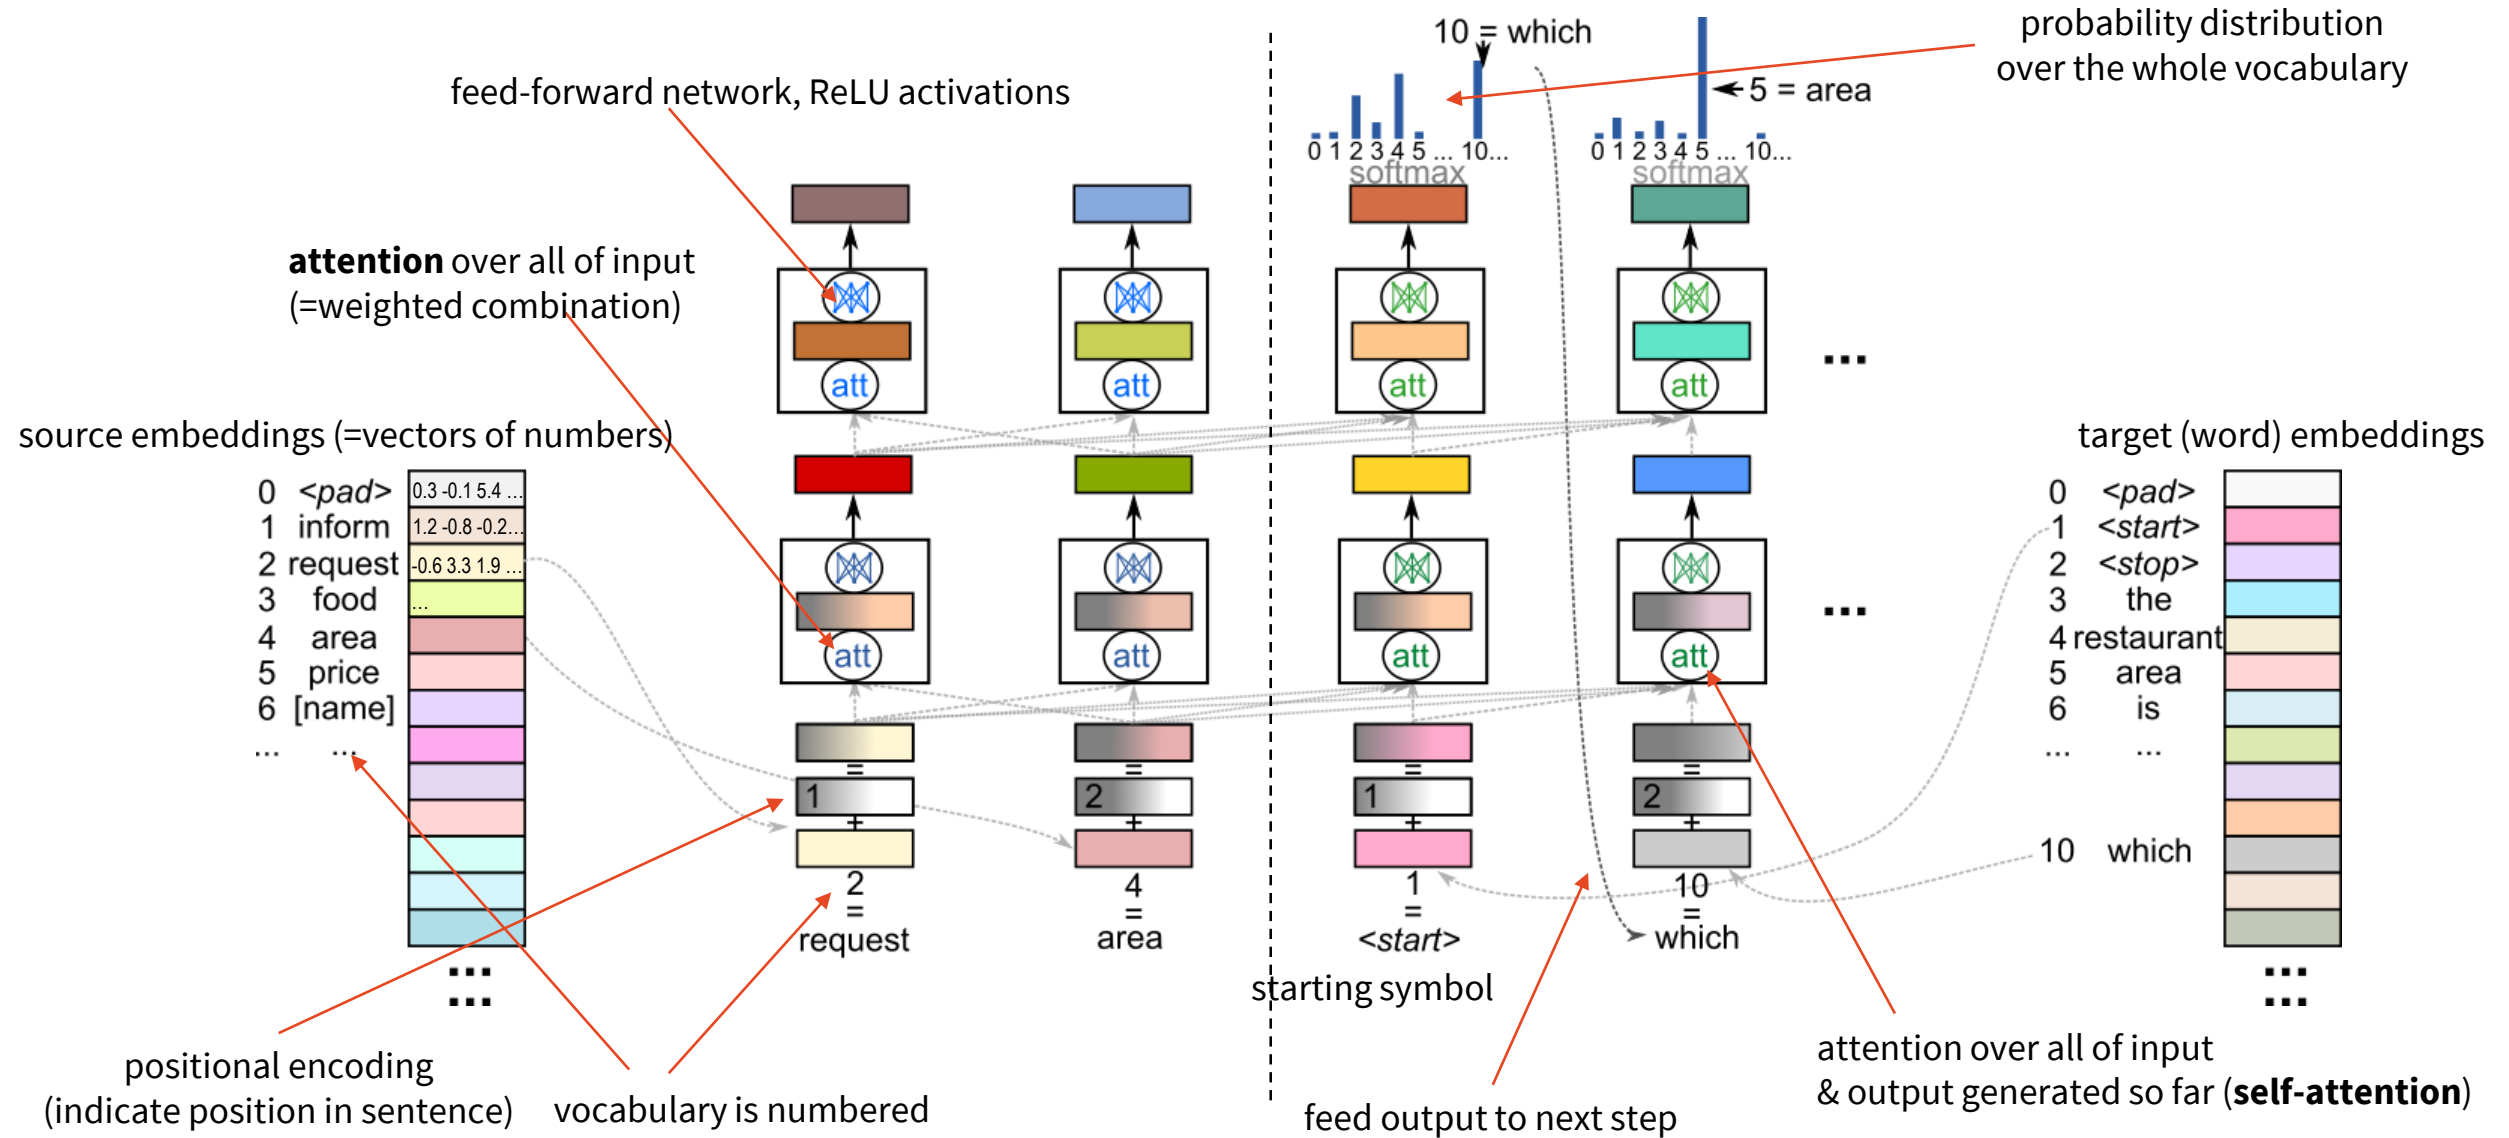

Neural NLG: (Pre-)Training

- Trained to produce sentence in data
 - low-level: exact word at each position

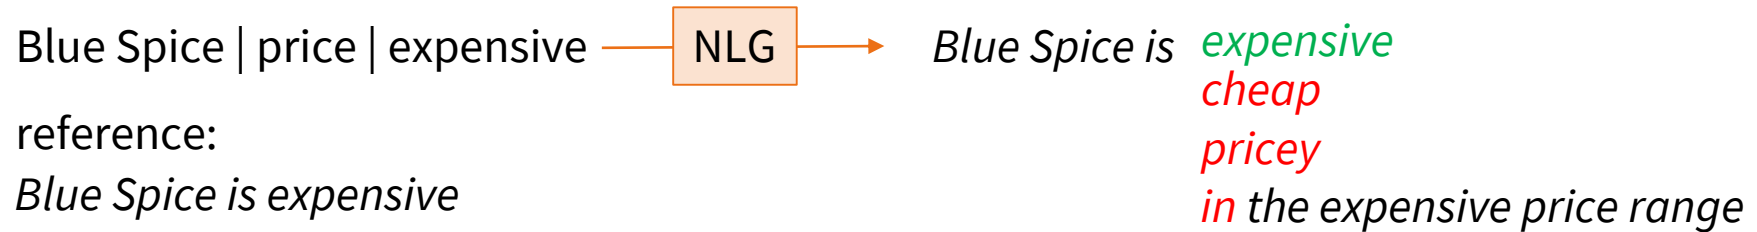


- Pretrained language models:

1. **Pretrain** a model on a huge dataset (**self-supervised**, language-based tasks)

- text-to-text: autoencoding & denoising

2. **Fine-tune** for your own task on your smaller data (**supervised**)

- models available online
 - get pretrained model, finetune yourself

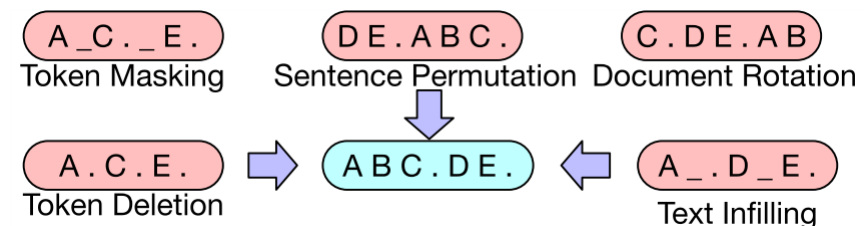


(Lewis et al., 2020)

<https://www.aclweb.org/anthology/2020.acl-main.703>

End-to-end NLG with a Pretrained LM

- Use a pretrained LM
 - e.g. (m)BART (GPT-2, T5... ~ 100M-1B params)
- Linearize data
 - concatenate, tokenize data
- Finetune PLM
 - direct data-text mapping: black box
- Needs domain-specific data
 - not enough training examples available (~10k)
 - data is noisy (comes from crowdsourcing)
- alternative: prompting LLMs (GPT3, ChatGPT... ~10-100B params)
 - little data needed, but even less controllable

Arrabiata sauce | country | Italy ▶ Italy | capital | Rome

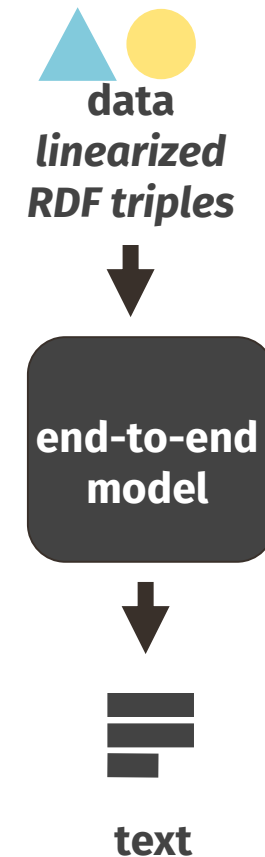

Arrabiata sauce is found in Italy where capital city is Rome.

Good

- Generally fluent and accurate
- Robust on input perturbations
- Can be multilingual

Bad

- Fails to generalize
 - factual or grammar errors
 - specifically on unseen relations
- Hallucinations
 - connects unrelated data

in: *Bakewell tart | ingredient | Frangipane*

out: Франжипан - один из ингредиентов тарта Бейквелл.
(=Frangipane is one of the ingredients of the Bakewell tart.)

in: *Ciudad_Ayala | populationMetro | 1777539*

out: The **population metro** of Ciudad Ayala is 1777539.


not seen in training data

in: *Nurhan Atasoy | birth date | 1934-01-01 ▶*
Nurhan Atasoy | residence | Istanbul ▶
Nurhan Atasoy | nationality | Turkish people

out: Nurhan Atasoy was born on January 1, 1934 **in Istanbul** and is a Turkish national.

residence, not birthplace!


- Represent input triples by templates
 - handcrafted preprocessing step
- Neural LMs to **fuse & rephrase**:
 - All text-to-text steps (=editing only)
 - 1) **order** (put related stuff together)
 - 2) **aggregate** (into sentences)
 - 3) **compress** (produce shorter sentences)
- Less space for semantic errors
 - Only use LMs for what they're good at – fluency
- Can use large general-domain data (~1M+)
- Works **zero-shot** – needs no in-domain data (just the templates)

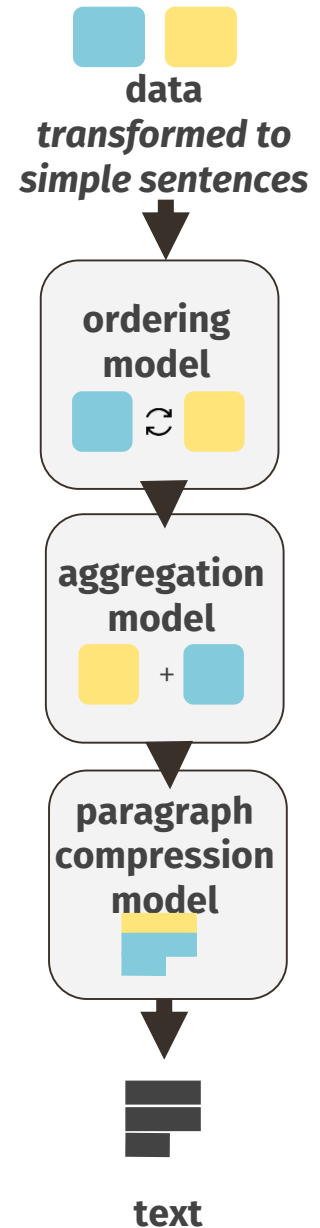

Templates

- 1 template per relation in data
 - Not so many needed (usually)
 - 354 for WebNLG DBPedia knowledge
 - 8 for E2E restaurants
 - Balances manual workload & controllability
 - Entities are then inserted verbatim
- Guaranteed accurate
- No need for high fluency
 - Some entities may need adjusting
 - LMs in the pipeline should deal with that

dataset	predicate	template
WebNLG	instrument	<s> plays <o>.
	countryOrigin	<s> comes from <o>.
	width	<s> is <o> wide.
E2E	eatType	<s> is a <o>.
	food	<s> serves <o> food.
	area	<s> is in the <o>.

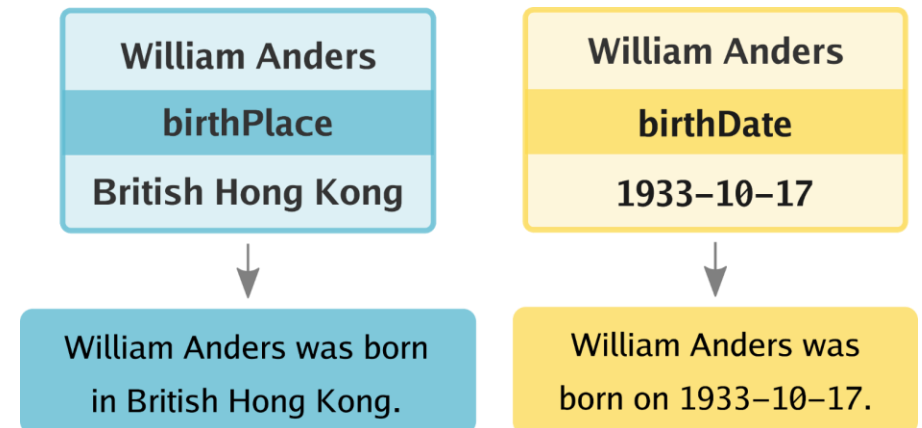

WikiFluent Corpus

- ~1M sentences from Wikipedia 1st paragraphs
 - human-written sentences as targets
 - creating artificial source data, which looks like single-triple templates
- Data creation process:
 - 1) split sentences (split & rephrase LM)
 - 2) replace pronouns
 - 3) randomize order
 - 4) opt. filter by logical entailment (NLI LM)
- much bigger than in-domain data
- used to train all LMs in the pipeline



Pipeline modules

1) Ordering


- BART with a pointer network

2) Aggregation

- RoBERTa + token classification
- 0/1: same/other sentence

3) Paragraph compression

- BART – generation
- close to pretraining tasks
- All trained on WikiFluent
 - 1M general-domain data
 - no in-domain data

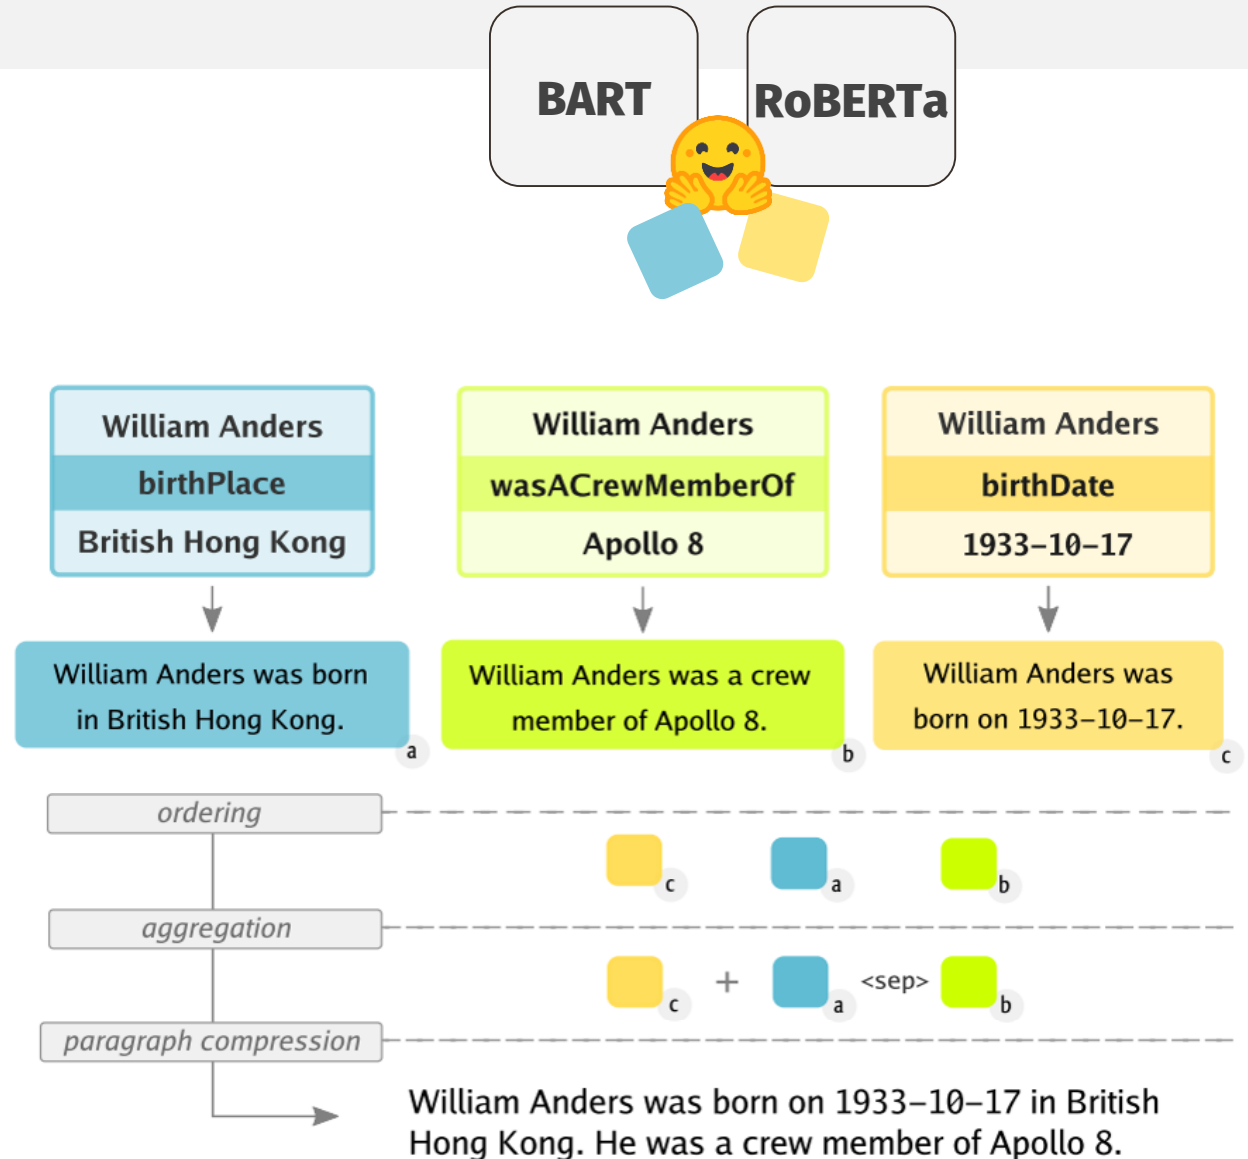

Templates + Neural Fuse & Rephrase

- Good accuracy
 - perfect for simpler data (E2E restaurants)
 - worse for complex data (WebNLG DBPedia)
 - still merging unrelated facts on WebNLG
- Slightly lower fluency (~older neural systems)
 - much better than templates
- 3-stage setup better than 1-stage (~end-to-end edit)
 - compared under the same setup
 - both on fluency and accuracy
- Manual templates are cumbersome (→→)

E2E	BLEU	Omission/ #facts	Hallucination /#examples
Older neural	40.73	0.016	0.083
Templates	24.19	0.000	0.000
Ours 1-stage	30.81	0.009	0.122
Ours 3-stage	36.04	0.001	0.001

WebNLG	BLEU	Omission/ #facts	Hallucination /#examples
Rule-based	38.65	0.075	0.101
Older neural	45.13	0.237	0.202
Templates	37.18	0.000	0.000
Ours 1-stage	39.08	0.071	0.204
Ours 3-stage	42.92	0.051	0.148

Example outputs

E2E

input: *The Cricketers* | eatType | restaurant ▶ *The Cricketers* | near | All Bar One ▶ *The Cricketers* | priceRange | cheap ▶ *The Cricketers* | food | Chinese ▶ *The Cricketers* | customerRating | average ▶ *The Cricketers* | familyFriendly | yes

templates: *The Cricketers is a restaurant. The Cricketers is near All Bar One. The Cricketers has cheap price range. The Cricketers serves Chinese food. The Cricketers has average customer rating. The Cricketers is family-friendly.*

output: The Cricketers is a restaurant serving Chinese food near All Bar One. It is family-friendly, has cheap price range and average customer rating.

WebNLG

input: *Allen Forrest* | background | solo singer ▶ *Allen Forrest* | genre | pop music ▶ *Allen Forrest* | birthplace | Dothan, Alabama

templates: *Allen Forrest is a solo singer. Allen Forrest performs Pop music. Allen Forrest was born in Dothan, Alabama.*

output: Allen Forrest is a solo singer who performs Pop music. He was born in Dothan, Alabama.

input: *Juan Perón* | party | Labour Party (Argentina) ▶ *Alberto Teisaire* | inOfficeWhilePresident | Juan Perón ▶ *Alberto Teisaire* | nationality | Argentina ▶ *Argentina* | language | Spanish language

templates: *Juan Perón belongs to the Labour Party Argentina. Alberto Teisaire was in office while Juan Perón was a president. Alberto Teisaire is from Argentina. Spanish language is spoken in Argentina.*

output: Alberto Teisaire is from Argentina, who was in office while Juan Perón was a president. He belongs to the Labour Party Argentina. Spanish language is spoken in Argentina.

Annotations: *disfluent* (arrow to "who"), *bad pronoun coreference* (arrow to "He")

input: *Alfa Romeo 164* | relatedMeanOfTransportation | Fiat Croma ▶ *Alfa Romeo 164* | assembly | Italy ▶ *Italy* | capital | Rome

templates: *Alfa Romeo 164 is related to Fiat Croma. Alfa Romeo 164 was assembled in Italy. Italy's capital is Rome.*

output: Alfa Romeo 164 was assembled in Italy's capital, Rome. It is related to Fiat Croma.

Annotation: *mixing unrelated facts* (arrow to "assembled in Italy's capital, Rome")

- Removing the data → template step in the pipeline
 - go 100% neural, zero-shot
- Relations are most important
 - entities can be copied verbatim
- Relation labels often difficult
 - relation direction often unclear
 - other label ambiguities
 - dependence on entities
- How good are PLMs at this?



model Werner Körte is the godparent of Rudolf Virchow.

ref Rudolf Virchow is the godparent of Werner Körte.

Category	lex	sem
model	High	Low
ref	Low	High



model Deepdale's occupant is Chorley Lynx.

ref Chorley Lynx plays at Deepdale.

Category	lex	sem
model	Low	High
ref	High	Low



model Dan Jones composed the music for My Scientology Movie.

ref Dan Jones composed the soundtrack for My Scientology Movie.

Category	lex	sem
model	High	High
ref	Low	High

relation	possible verbalization
<i>is part of</i>	X is part of Y.
<i>duration</i>	X lasted for Y.
<i>platform</i>	X is available on Y. X runs on Y.
<i>country</i>	X was born in Y. X is located in Y.
<i>parent</i>	X is the parent of Y. Y is the parent of X.
<i>ChEMBL</i>	X has an id Y in the ChEMBL database.

Rel2Text dataset

- Current data-to-text datasets unsuitable to test this
 - low number of distinct relations
 - few unseen in training set
- **New Rel2Text dataset:** 1.5k unique relations
 - source: Wikidata, YAGO, DBPedia
 - no train-test overlap
- **Crowdsourced** collection
 - 1-5 instances per relation
 - workers asked to rewrite relation as sentence
 - given relation labels & descriptions
 - **manual checks** for noise
 - 7.3k instances collected → 4k “clean”
 - ~ **hard** even for (untrained) people

Describing Graph Relations

Hints:

- You can *click* on the concepts to insert them in the text field.
- You can *hover* your mouse over the diagram to see additional description(s).
- Click *Options...* if you have troubles formulating the answer.

Balmoral Castle → home port → London

Describe the relation from the diagram in one sentence:

The home port of Balmoral Castle is in London.

« Previous Submit Options...

Evaluating PLMs on Rel2Text

- Evaluation on unseen relations only
- Same PLM (BART), finetuned on different data
 - WebNLG = less diversity, more data
 - Rel2Text = many relations
 - Rel2Text with relation descriptions
 - Rel2Text with masked relation labels
 - guessing from entities only
 - Few-shot setups (e.g. 100 instances only)
- Finetuning works
 - Full Rel2Text best
 - Relation descriptions don't help much
 - WebNLG also good (esp. on correctness)
 - Few-shot doesn't work so well

Rel2Text	BLEU	% Log. Entail	PPL↓ (GPT2)
Human	-	-	5.88
Copy baseline	29.04	91.21	7.55
BART-WebNLG	41.99	89.39	5.65
BART-Rel2Text	52.54	91.85	5.89
+rel. descriptions	53.07	91.88	5.92
- rel. labels (guess)	42.53	57.26	5.66
Few-shot 100	45.88	83.06	5.85

~overlap with human
~correctness
~fluency


Error Analysis

- 100 examples, multiple error classes

model errors	SEM semantic error	Yusra Matine <i>sport country</i> Morocco
	DIR swapped direction	Kentucky Channel <i>former broadcast network</i> KET ED
	LIT verbalization too literal	Vietnam Television <i>first air date</i> 1970-09-07
	LEX lexical/grammar error	RPG-43 <i>used in war</i> The Troubles
data errors	LBL label unclear	General Motors Epsilon platform <i>vehicle</i> Cadillac XTS

- ✗ Yusra Matine was born in Morocco.
- ✓ Yusra Matine plays for Morocco.
- ✗ KET ED was broadcast on Kentucky Channel ED.
- ✓ The Kentucky Channel was broadcast on KET ED.
- ✗ The first air date of Vietnam Television was 1970-09-07.
- ✓ Vietnam Television first aired on 1970-09-07.
- ✗ RPG-43 was used in the The Troubles.
- ✓ The RPG-43 was used in the Troubles.
- ✗ General Motors Epsilon is a vehicle similar to the Cadillac XTS.
- ✓ General Motors Epsilon platform is used in the Cadillac XTS.

- Near constant % of unclear labels
 - leading to SEM errors
- Still some “unprovoked” SEM errors
 - more with few-shot & masked
- Rel2Text less LIT than WebNLG

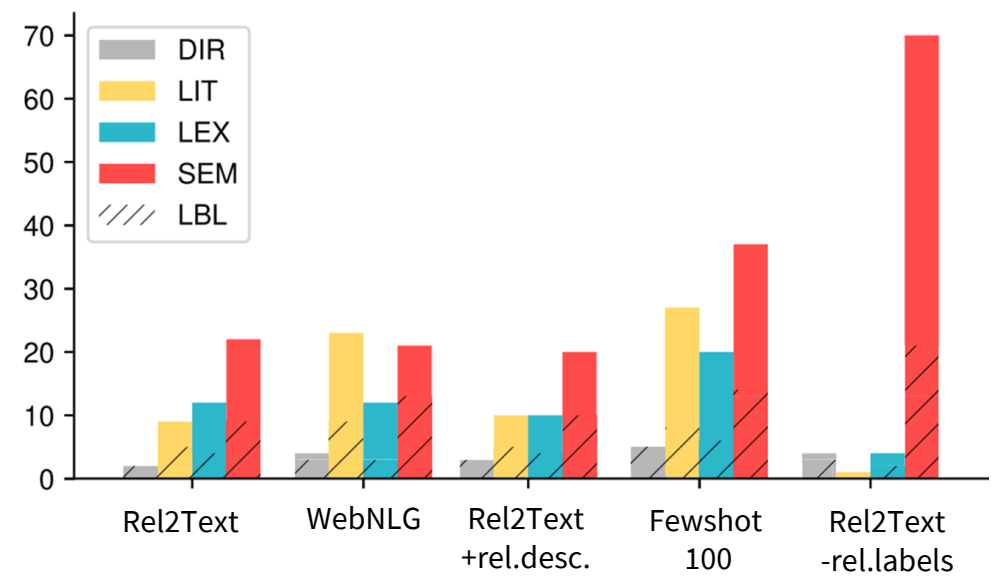

Final Remarks

- Rel2Text viable with a full pipeline
 - comparable to templates
- Prompting LLMs ~ similar
 - GPT3 “templates” by Xiang et al.
- Clear relation labels are essential
 - even humans confused without them
 - additional descriptions help
- Ambiguities in data should be fixed prior to generation
- Still >0% hallucinations – more semantics needed (work in progress)


WebNLG	BLEU	Omission/ #facts	Hallucination/ #examples
Templates	37.18	0.000	0.000
Templates + 3-stage	42.92	0.051	0.148
BART/Rel2Text + 3-stage	44.63	0.058	0.166
GPT3 + 1-stage (Xiang et al.)	43.33	-	-

Thanks

Contact us:



Ondřej Dušek
odusek@ufal.mff.cuni.cz
<https://tuetschek.github.io>
[@tuetschek](#)

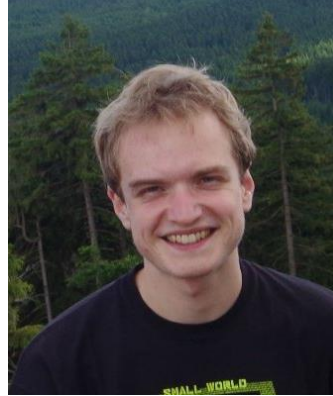

Zdeněk Kasner
kasner@ufal.mff.cuni.cz
<http://ufal.cz/zdenek-kasner>
[@ZdenekKasner](#)



Ioannis Konstas
i.konstas@hw.ac.uk
<http://www.ikonstas.net/>
[@sinantie](#)

References:

- Base pretrained LMs: (Kasner & Dušek, INLG/WebNLG 2020) <https://aclanthology.org/2020.webnlg-1.20/>
- Zero-shot pipeline: (Kasner & Dušek, ACL 2022) <https://aclanthology.org/2022.acl-long.271/>
- Rel2Text: (Kasner, Konstas & Dušek, EACL 2023) <https://arxiv.org/abs/2210.07373>